



**Gold Standard**<sup>®</sup>  
for the Global Goals

TEMPLATE

# MONITORING REPORT

---

PUBLICATION DATE **14.10.2020**

VERSION **v. 1.1**

RELATED SUPPORT – **TEMPLATE GUIDE Monitoring Report v. 1.1**

---

This document contains the following Sections

**Key Project Information**

SECTION A - Description of project

SECTION B - Implementation of project

SECTION C - Description of monitoring system applied by the project

SECTION D - Data and parameters

SECTION E - Calculation of SDG Impacts

SECTION F - Safeguards Reporting

SECTION G - Stakeholder inputs and legal disputes

## KEY PROJECT INFORMATION

### Key Project Information

<b>GS ID (s) of Project (s)</b>	GS1020
<b>Title of the project (s) covered by monitoring report</b>	Production and dissemination of Ceramic Water Purifiers by Hydrologic, in the Kingdom of Cambodia
<b>Version number of the PDD/VPA-DD (s) applicable to this monitoring report</b>	11.2
<b>Version number of the monitoring report</b>	2.0
<b>Completion date of the monitoring report</b>	16/06/2025
<b>Date of project design certification</b>	28/12/2017 (CPII renewal)
<b>Date of Last Annual Report</b>	NA
<b>Monitoring period number</b>	7 <sup>th</sup> of the 2 <sup>nd</sup> crediting period
<b>Duration of this monitoring period</b>	01/01/2024- 30/11/2024 (including both days)
<b>Project Representative</b>	Hydrologic Social Enterprise Ltd.
<b>Host Country</b>	Cambodia
<b>Activity Requirements applied</b>	<input checked="" type="checkbox"/> Community Services Activities <input type="checkbox"/> Renewable Energy Activities <input type="checkbox"/> Land Use and Forestry Activities/Risks & Capacities <input type="checkbox"/> N/A
<b>Methodology (ies) applied and version number</b>	Technologies and Practices to Displace Decentralized Thermal Energy Consumption Version 3.0-July 2015
<b>Product Requirements applied</b>	<input checked="" type="checkbox"/> GHG Emissions Reduction & Sequestration <input type="checkbox"/> Renewable Energy Label <input type="checkbox"/> N/A

**Table 1 - Sustainable Development Contributions Achieved**

Sustainable Development Goals Targeted	SDG Impact	Amount Achieved	Units/ Products
SDG1. No Poverty	Amount of fuel save after using project technology	49,843	Tonne of Biomass
		946	Tonne of LPG

	Percentage of household noted on money save after using the project technology	89.09%	%
	Percentage of household noted on time save after using the project technology	85.32%	%
SDG3. Good Health and well being	Number of people who notice less smoke in kitchen after having water filter	317,810	People
SDG5. Gender Equality	Number of women and girls benefiting from stop/reduce boiling water and collecting/purchasing cooking fuel	179,579	People
SDG6. Clean water and sanitation	Number of people with access to safe drinking water	562,297	People
SDG7: Affordable and clean energy	Amount of energy saves from avoiding boiling water in the project activity	792	TJ
SDG8: Decent work and economic growth	Number of new jobs created by the project with safe and healthy work environment	114	People
SDG13: Climate action	Total emission reduction	35,018	VERs
SDG15: Life on Land	the areas of forest save	307	Hectare

**Table 2 - Product Vintages**

		Amount Achieved		
Start Dates	End Dates	VERs	...	...
01/01/2024	30/11/2024	35,018		

**SECTION A. DESCRIPTION OF PROJECT**

**A.1. General description of project**

In 2002, the NGO International Development Enterprise (IDE Cambodia) introduced Ceramic Water Purifiers (CWPs) into Cambodia as a way to filter safe drinking water for Cambodian households. These units will treat contaminated drinking water, and reduce the demand for conventional water treatment through boiling water with non-renewable biomass.

The CWPs are manufactured using locally available skills and are simple, low cost and easy to use. In December 2010, IDE Cambodia spun off its CWP manufacturing program creating a subsidiary called Hydrologic Social Enterprise. The project has started since 2010 and registered as a carbon project under a standard named “the Gold Standard” (GS) in 2012. By registering as GS project, the project could mobilize extra fund for its implementation besides selling the water filter, i.e. Hydrologic has been able to expand its sale network to remote areas.

**Project milestone:**

- Start date of the project is 09/02/2010, which was the date Hydrologic committed financially by signing a contract with a contractor to build the factory, GS registration date: 08/08/2012 (date of CP2 renewal was: 28/12/2017)
- GS Crediting period start date: 1<sup>st</sup> crediting period: 01/12/2010, 2<sup>nd</sup> crediting period: 01/12/2017
- The expected project operational lifetimes is 21 years. As long as, there is business for water filters in Cambodia and Hydrologic remains financially viable. Then, the business will remain open which is expected to be more than 21 years. As mentioned above, the factory opened in February 2010 and the 1<sup>st</sup> crediting period started in December 2010. Hydrologic confirms that its intention is not to close the factory before January 2032.

**A.2. Location of project**

The project boundary for the distribution of the Hydrologic Ceramic Water Purifiers is the Kingdom of Cambodia. The project proponent has a purpose-built factory to produce the CWPs near Kampong Chhnang province, Cambodia. With the main three sale channels, hydrologic has been actively selling its CWPs throughout the country.



No	Name of province/city/capital	Latitude	Longitude
11	Kratie	12°29'17.2"N	106°1'7.64"E
12	Mondul Kiri	12°27'20.99"N	107°11'17.2"E
13	Oddar Meanchey	14°10'54.3"N	103°31'3.4"E
14	Pailin	12°50'56.22"N	102°36'33.41"E
15	Phnom Penh	11°33'44.82"N	104°54'57.64"E
16	Preah Sihanouk	10°36'33.55"N	103°31'46.49"E
17	Preah Vihear	13°48'26.32"N	104°58'49.66"E
18	Prey Veng	11°29'12.55"N	105°19'31.19"E
19	Pursat	12°32'19.61"N	103°55'9.12"E
20	Ratanak Kiri	13°44'21.8"N	106°59'14.17"E
21	Siemreap	13°21'42.44"N	103°51'38.02"E
22	Stung Treng	13°31'33.1"N	105°58'5.88"E
23	Svay Rieng	11°5'16.26"N	105°47'57.66"E
24	Takeo	10°59'26.92"N	104°47'5.93"E
25	Tboung Khmum	11.9214° N	105.6002° E

A.3. Reference of applied methodology

- Baseline and monitoring methodologies: [Technologies and Practices to Displace Decentralized Thermal Energy Consumption, version 3.0 - July 2015](#).
- f<sub>NRB</sub>'s calculation methodological tool: <https://cdm.unfccc.int/methodologies/PAMethodologies/tools/am-tool-30-v4.0.pdf>
- Guidelines for carrying out usage surveys for projects implementing household water filtration technologies, ([TPDDTEC version 3.0, Annex9](#)).

A.4. Crediting period of project

Start date of CP: 01/12/2017 (2<sup>nd</sup> CP)

End date of CP: 30/11/2024 (2<sup>nd</sup> CP)

Length of second crediting period: 7 years

## SECTION B. IMPLEMENTATION OF PROJECT

### B.1. Description of implemented project

The project sold 31,945<sup>1</sup> Ceramic Water Purifiers (CWPs) during the period from 01/01/2024 to 30/11/2024. Cumulatively, the project sold 586,531<sup>2</sup> CWPs from the project start date (01/12/2010) to 30/11/2024 and reduced 35,018 tonnes<sup>3</sup> of GHG emissions (tCO<sub>2</sub>e) for this monitoring period. During this period, PP has been monitoring closely all the activities as required by the GS.

This project is an end-use energy efficiency improvement project, registered under the Voluntary Gold Standard methodology: “Technologies and Practices to Displace Decentralized Thermal Energy Consumption version 3.0 - July 2015”.

The project has been implemented as described in the PDD in section A.3. The technology used during this monitoring period is the same as described in the PDD. There has been no change in the technology.

### Project Activities

The starting date of operation of the project activity was 09/02/2010<sup>4</sup>, which was the date Hydrologic committed financially by signing a contract with a contractor to build the factory production of CWPs.

The Ceramic Water Purifiers are sold throughout Cambodia and are not all installed at the start of the project but are installed progressively during the 1<sup>st</sup> and 2<sup>nd</sup> crediting period. The table below reflects the installation number per month from 01/01/2024 to 30/11/2024 (including both days). The other installations before this period are detailed in “ER calculation spreadsheet, tab Units\_month” and they were verified during previous monitoring period.

**Table 4 - Summary of sales during the current monitoring period**

Distribution period		Type of CWPs <sup>5</sup>					Units sold
From	To	Original Tunsai	Super Tunsai	Tunsai Thom	Tunsai Thom Autofill	Super Tunsai Plus	Total
1-Jan-24	31-Jan-24	2,225	2,460	68	8	-	4,761
1-Feb-24	28-Feb-24	47	2,433	55	7	-	2,542
1-Mar-24	31-Mar-24	470	2,579	86	6	-	3,141
1-Apr-24	30-Apr-24	556	1,977	89	2	-	2,624
1-May-24	31-May-24	92	2,455	57	14	-	2,618
1-Jun-24	30-Jun-24	194	2,233	85	1	-	2,513
1-Jul-24	31-Jul-24	172	1,653	83	20	724	2,652
1-Aug-24	31-Aug-24	79	766	132	13	1,651	2,641
1-Sep-24	30-Sep-24	145	107	38	5	2,364	2,659
1-Oct-24	31-Oct-24	121	91	44	13	3,114	3,383

<sup>1</sup> Source: Sale database

<sup>2</sup> Source: ER calculation spreadsheet, Tab: Units\_monthly, sum (E6:E173)

<sup>3</sup> Source: ER calculation spreadsheet, Tab: Nexus\_Summary, cell F12.


<sup>4</sup> Source: registered PDD

<sup>5</sup>While “Tunsai”, “Super Tunsai” and “Tunsai Autofill” were named in previous monitoring periods. In this monitoring period, Hydrologic has standardized its produce names without changing its technical specification. The “Orginal Tunsai”, “Super Tunsai”, “Tunsai Thom”, “Tunsai Thom Autofill” and “ Super Tunsai Plus”.


1-Nov-24	30-Nov-24	78	189	75	12	2,057	2,411
<b>Total</b>		<b>4,179</b>	<b>16,943</b>	<b>812</b>	<b>101</b>	<b>9,910</b>	<b>31,945</b>

Hydrologic produced all the filters at their purpose-built factory in Cambodia. Local production using locally available skills has continued to provide low-cost production while providing gainful employment to local people. So far, Hydrologic has manufactured four types of water filters: Original Tunsai, Super Tunsai, Tunsai Thom and Tunsai Thom Auto but from July 2024, Hydrologic introduced one more product named "Super Tunsai Plus" in the market.


Thus, for this MP, there are five products from Hydrologic namely "Original Tunsai", "Super Tunsai", "Tunsai Thom", "Tusai Thom Autofill" and "Super Tunsai Plus". All five have the same characteristics as illustrated in Figure 2, Figure 3 and Figure 4 with the only difference being the size of the receptacle and the design. These differences do not affect the estimates in carbon reduction. For carbon credit purposes, the ceramic pot processes the same amount of water in those five products, therefore it is considered only one size product.

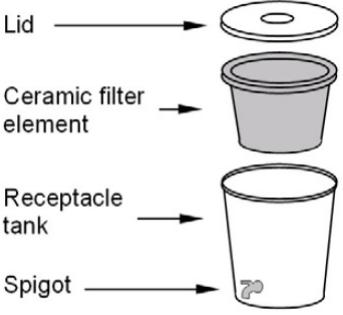Original Tunsai Elements	Original Tunsai Water Purifier Data:	
 <p>Lid</p> <p>Ceramic filter element</p> <p>Receptacle tank</p> <p>Spigot</p>	Filter Element Type	Ceramic Clay Pot
	Filter Capacity (Volume)	Approx. 10 L
	Filter Capacity Flow Rate	Typically: 2 - 4.5 L/Hr Typically: 30 L/Day
	Receptacle Type	Closed safe storage food grade plastic receptacle
	Receptacle Storage Capacity (volume)	Approx. 12 L
	Spigot Type	Plastic
	Plastic Type	Food grade polypropylene

**Figure 2 - Original Tunsai and its technical specification**

Super Tunsai and Super Tunsai Plus Elements <sup>6</sup>	Super Tunsai and Super Tunsai Plus Water Purifier Data:	
	Filter Element Type	Ceramic Clay Pot
	Filter Capacity (Volume)	Approx. 10 L
	Filter Capacity Flow Rate	Typically: 2 – 4.5 L/Hr Typically: 30 L/Day
	Receptacle Type	Closed safe storage food grade plastic receptacle
	Receptacle Storage Capacity (volume)	Approx. 14 L for Super Tunsai Approx. 18 L for Super Tunsai Plus.
	Spigot Type	Plastic
	Plastic Type	Food grade polypropylene

**Figure 3 - Super Tunsai / Super Tunsai Plus and its technical specification**

Tunsai Thom and Tunsai Thom Autofill <sup>7</sup> Elements	Tunsai Thom Water Purifier Data:	
	Filter Element Type	Ceramic Clay Pot
	Filter Capacity (Volume)	Approx. 10 L
	Filter Capacity Flow Rate	Typically: 2 – 4.5 L/Hr Typically: 30 L/Day
	Receptacle Type	Closed safe storage food grade plastic receptacle
	Receptacle Storage Capacity (volume)	Approx. 18 L
	Spigot Type	Plastic
	Plastic Type	Food grade polypropylene

**Figure 4 - Tunsai Thom or Tunsai Thom Autofill and its technical specification**

Hydrologic has maintained a total sales record of all sales through three main channels:

- Direct sales to end users by Hydrologic sales staff
- Sales to retail sales agents who purchase CWP's wholesale and sell them to retailers and local intermediaries
- NGOs that purchase wholesale CWP's and typically sell them at a subsidized price.

For direct sales, Hydrologic holds meetings to share with interested communities the potential benefits of the CWP. At these meetings, households who are interested in purchasing CWP but couldn't afford to pay all the cost at once, they can purchase it by instalment if their repayment capacity is good based on Hydrologic credit team assessment. For retail sales, sales agents working on commission sell CWP's to retailers

<sup>6</sup> "Super Tunsai" and "Super Tunsai Plus" share the same technical specifications, with the only differences being the receptacle storage size and color. The Super Tunsai features a 14-liter transparent receptacle, while the Super Tunsai Plus comes with an 18-liter blue receptacle.

<sup>7</sup> "Tunsai Thom" and "Tunsai Thom Autofill" are having the same technical specification, except the Tunsai Thom Autofill is equipped with "Autofill tool" which automatically fill CWP with the piped water's network.

throughout several provinces. Hydrologic also sells the purifiers to NGOs wishing to distribute or sell the CWPs at subsidized rates.

Under this monitoring period, all the three main sale channels, the selling price to the end user might not be the same as detail in the price list<sup>8</sup>.

For direct sale managed by Hydrologic, only four type of CWPs including Super Tunsai, Super Tunsai Plus, Tunsai Thom and Tunsai Thom Autofill are sold by cash or instalment with different price as detail in Table 5. It should be noted that the original Tunsai is not sold through direct sale channel due to low market demand, which is primarily attributed to its bold design, despite its low price. However, it is distributed through NGO sales, where it may be donated to villagers.

**Table 5 - Price of CWPs per each type and mode of payment**

<b>Tunsai Product Items</b>	<b>Cash Sale</b>	<b>Credit Sale (Instalment)</b>
Super Tunsai	180,000 Riel (45.0\$)	190,000 Riel (47.5\$)
Super Tunsai Plus	190,000 Riel (47.5\$)	210,000 Riel (52.5\$)
Tunsai Thom	200,000 Riel (50\$)	220,000 Riel (55\$)
Tunsai Thom Autofill	260,000 Riel (65\$)	280,000 Riel (70\$)

Additionally, throughout the monitoring period, Hydrologic has maintained a project database containing the contact details of end users to the extent possible of 94,965 users<sup>9</sup>.

During Dec 2024, Hydrologic has contracted with Absolute Consulting Services<sup>10</sup> (ACS) to conduct monitoring survey including usage survey and project survey to accurately calculate the monitoring parameters outlined in the Project Design Document and GS4GG transition Annex. The surveys were conducted with its own specific purpose and with different number of required samples. The sample selection also took into account the different age group of CWP (age 1 to age 5) from the project database in which end-users from 01 July 2019 to 30 June 2024 are eligible to be included in this sample selection for conservative approach based on the registered methodology TPDDTEC V3.0<sup>11</sup> and the required samples were derived as per the parameters and conditions laid down in the methodology section of the monitoring survey report<sup>12</sup>. Number of surveyed households per each survey is shown in below table:

**Table 6 - Number of the survey households**

<b>No</b>	<b>Survey</b>	<b>Number of end user eligible for this sample selection<sup>13</sup></b>	<b>Number of surveyed households</b>
1	Usage survey	94,965	192

<sup>8</sup> HSE-CP2-MP7-DS-Price

<sup>9</sup> Project database, Tab Summary "Cell J11".

<sup>10</sup> ACS's company registration

<sup>11</sup> Footnote 33 of TPDDTEC V3.0

<sup>12</sup> HSE\_CP2-MP7\_2024\_US-PS-WCFT\_V3.0, pages 8-11.

<sup>13</sup> Sample\_Frame&Project\_Data2019-2024, Tab Summary "cell O29"

2	Project survey	94,965	158 <sup>14</sup>
3	Water Consumption Field Test (WCFT)	94,965	123 <sup>15</sup>

Hydrologic has implemented ongoing monitoring of sales, end-user contact details, usage rates and leakage. The sales database records monthly sales of the CWPs and the project database records end-user information, when feasible. Hydrologic has monitored the usage rates of the CWPs through the usage survey by employing ACS, consulting company, to conduct the survey to ensure the project claims an appropriate useful life of the technology. End-users have the opportunity to replace broken parts or the entire unit at no cost through a 2-year warranty system. This system extends the lifespan of the CWP by providing a warranty card with the information necessary to replace broken parts or units in the box of each CWP. End-users are also provided with detailed instructions outlining the proper care and maintenance of the CWP.

Hydrologic has also monitored the sources of leakage identified by the leakage assessment conducted in the first Monitoring Period of CP1, namely LPG purchased for firing the CWPs in the factory kilns, diesel and gasoline consumption for generator use at the factory for this MP.

Hydrologic has also fully implemented the actions mitigating against double counting as outlined in the PDD, including:

- i. Hydrologic has added a serial number to all water filters produced and kept the numbers in a database<sup>16</sup>
- ii. The design of the water filters from Hydrologic look physically different from other water filters in the market, making it easy to recognize them; and
- iii. Hydrologic will only account for the water filters coming out of their factory, thus removing the risk that other water filters may be double counted<sup>17</sup>.

---

<sup>14</sup> The 158 households were among the 186 households who participated in usage survey.

<sup>15</sup> The 123 households were among the 158 households who participated in the project survey.

<sup>16</sup> HSE\_CP2-MP7\_Serial Number

<sup>17</sup> Sales Database

B.1.1. Forward Action Requests

During the third (3<sup>rd</sup>) verification (Monitoring Period 3<sup>rd</sup>: 01/05/2013 – 30/04/2014), one FAR was raised by GS as seen in Table 7. It should be noted that this FAR was addressed in CP1 but for CP2, PD continue to monitor the replacement of ceramic filter element for better understanding the working performance of the ceramic water purifier.

**Table 7 - FAR raised by GS in CP1-MP3**

Description of FAR	Raised by (VVB, GS)	Summary of Project participant response
According to the registered PDD in the 1 <sup>st</sup> crediting period "The ceramic filter element has an average lifespan of two years or more. Lifespan depends on the quality of the input water and the care taken to avoid breakage." The PP is requested to provide details on number of ceramic filter element replaced (age group wise) in next monitoring period.	GS	Project Proponent has tracked the replacement of ceramic filter element (age group wise) and has incorporated the details in a table (see below) in this monitoring period.

During the current monitoring period, replacement was done for Pots and for spigots (tap). However, Hydrologic has calculated the replacement rate by taking the overall replacement (Pots and spigot) during the monitoring period.

Hydrologic has disseminated 31,945 units during the monitoring period from 01/01/2024 to 30/11/2024 and 156,304<sup>18</sup> cumulatively credited units over CP2-MP7. It should be noted that in the cumulative credited units five or older years old CWP's age were retired. During this CP2-MP7, 282 CWP's pots and 16 spigots were replaced which representing 0.2% of the cumulative units credited as of 30 Nov 2024 as seen in Table 8.

**Table 8 - Filter element replacement**

Filter elements replacement and number of visited units each Age Group <sup>19</sup>								
Category	0-1	1-2	2-3	3-4	4-5	5-6 &Older	No age record	Total
<b>Pot</b>	101	60	29	6	6	0	80	282
<b>Spigot</b>	3	7	2	0	0	0	4	16
<b>Total replacement</b>	104	67	31	6	6	0	84	298

Another FAR has been raised by GS during the 5<sup>th</sup> monitoring period (MP5: 01/05/2015-30/04/2016). This FAR has been addressed as following Table 9.

<sup>18</sup> ER spreadsheet, tab Units per month, cell H173

<sup>19</sup> HSE\_CP2-MP7-Replacement Report 2024, tab Summary

**Table 9 - FAR raised by GS in CP1-MP5**

Description of FAR	Raised by (VVB, GS)	Summary of Project participant response
The PP shall improve the sale data collection system to avoid any duplicate in next monitoring period. More trainings shall be provided to database implementer	GS	It should be noted that the sale database system has been well managed so far, but the project database found some issues related to duplicated record of CWP’s users during MP5 monitoring period. To address this issue during this monitoring period (CP2-MP7), PP has followed previous action by inviting a carbon consultant from Nexus to conduct a database refreshing training <sup>20</sup> in Oct 2024 to their customer service team who is responsible for recording project database. Furthermore, PP has created an automated checking column in the project database spreadsheet to alert if the information is duplicated in “the project database”.

Another FAR has been raised by SustainCert/VVB during the issuance review process of CP2-MP3 as “In section G.2, it shall be clearly confirmed whether any mitigation measures have been agreed to be monitored for the next monitoring period”. In this monitoring period (CP2-MP7), Hydrologic has monitored the three indicators as shown in the Table 10 and the same is reported in section G.2.

**Table 10 - Monitoring of mitigation measured (FAR raised by Sustaincert during CP2-MP3)**

Description of Sustainability Matrix	Monitoring
To address the concern of high price of CWP, the calculation of the CWP is based on the break-even price of the water filter +10% markup price if there is carbon finance.	Based on the annual sale in this monitoring period, the weighted average price charged for all types of CWP is estimated to be \$36.82 which is below its break-even price + 10% profit margin weighted average of \$43.54. The weighted average selling price of CWP over the past five years has shown a slight increase, rising from USD 25.65 in CP2-MP3 to USD 36.82 in CP3-MP7. This trend is largely due to the rising cost of goods sold, as HSE introduced innovative products such as Tunsai Thom, Tunsai Autofill, and Super Tunsai Plus during this period. Additionally, the

<sup>20</sup> HSE\_CP2-MP7\_minute\_database\_Refreshing\_training

	<p>annual national inflation rate<sup>21</sup> ranging from 2% to 5%, has contributed to the overall increase in prices. Despite these factors, HSE has managed to keep its selling price below the break-even price plus 10%.</p> <p>The detail of the break-even price + 10% markup price is described and available to VVB<sup>22</sup>.</p>
<p>To address the concern of the place where the clay is taken, Hydrologic will buy the clay only from the licensed brick manufacturing factory that authorized by the Ministry of Industry and Handicraft.</p>	<p>During this monitoring, PP has not purchased clay because they have enough stock from its previous purchase in 2018 from a nearby licensed brick factory. It should be noted that Hydrologic’s factory is located in the brick manufacturing zone, where access to clay from the licensed factory is not difficult.</p>
<p>To address the concern of corruption, the field Surveys will monitor and ask how much people are paying for the water filters and assess that the prices are not unreasonable. If the prices are unreasonable, PP shall investigate the reason and take appropriate action. PP believes that this risk is low because there are so many salespeople that competition will keep the price low.</p>	<p>The monitoring survey revealed that the mean purchase price for ceramic water purifier (CWP) is \$43.32 which is in line with current pricing<sup>23</sup>(\$45).</p>

B.2. Post-Design Certification changes

B.2.1. Temporary deviations from the approved Monitoring & Reporting Plan, methodology or standardized baseline

N/A

B.2.2. Corrections

N/A

B.2.3. Changes to start date of crediting period

N/A

B.2.4. Permanent changes from the Design Certified monitoring plan, applied methodology or applied standardized baseline

Since CP2-MP6, there has been a permanence change of the sources of leakage in the registered PDD in which PP used firewood to fuel the kilns to fire the ceramic pots. From the last MP, PP has switched from wood to LPG to fuel the kiln to fire the ceramic pots. It should be noted that this fuel switch is done as part of Hydrologic improvement at production line for better working environment as well as reducing GHG emission at the production line. As a result of this fuel switch, there are lesser amount of GHG leakage emissions than estimated, however, there is no material impact of this change as estimated leakage emissions in the design certified PDD are negligible. The preparation

<sup>21</sup> Cambodia inflation rate:  
<https://data.worldbank.org/indicator/FP.CPI.TOTL.ZG?end=2023&locations=KH&start=2018>

<sup>22</sup> HSE-CP2-MP7-Break Even Price\_Jan-Nov 24

<sup>23</sup> HSE\_CP2-MP7-DS-Price

and installation of the kiln was completed within January 2023 as shown in the summary report of the LPG Kiln installation<sup>24</sup>.

#### B.2.5. Changes to project design of approved project

Since PP switch from wood to LPG fired kiln, there are lesser amount of GHG leakage emissions than estimated, however, there is no material impact of this change as estimated leakage emissions in the design certified PDD are negligible. However, PP will continue to monitor and record the amount of LPG use to fire the ceramic pots and the detail of calculation of GHG emission from burning LPG is calculated in ER calculation sheet<sup>25</sup>.

---

<sup>24</sup> Summary report of the LPG kiln installation

<sup>25</sup> ER calculation sheet, Tab Leakage, cell R30.

## SECTION C. DESCRIPTION OF MONITORING SYSTEM APPLIED BY THE PROJECT

The project proponent has been conducting the following monitoring activities:

### **Project Surveys (PS)**

The safe water project survey is conducted with end-users representative of the project scenario target population and currently using the safe water project technology. The project survey is carried out using representative and random sampling following the GS guidelines for minimum sample size:

- Group size <300: Minimum sample size 30
- Group 300 to minimum to 1000: Minimum sample size 10% of group size
- Group size >1,000: Minimum sample size 100

The project survey has a minimum sample size of 100 as the number of units sold is greater than 1,000.

End users for the project survey is selected using representative sampling techniques to ensure adequate representation of users with technologies of different ages. Common sampling approaches such as clustered random sampling are allowed and geographic distribution is factored into selection criteria<sup>26</sup>. End users can be surveyed at any time(s) throughout the year with care taken to collect information pertaining to seasonal variations in technology and fuel use patterns.

For this monitoring period, the project survey was conducted in December 2024 together with usage survey and Water Consumption Field Test (WCFT). It should be noted that although both surveys and WCFT were conducted concurrently their sample size are not the same due to their different sample selection criteria. While eligible households for usage survey are those who have ever owned CWP, eligible households for project survey and WCFT are those who are currently still using CWP. Furthermore, not all the household who joined the project survey are available for WCFT as the test requires 4 consecutive days. With these criteria, during this MP, a total of 192 households who have ever owned CWP participated in the usage survey and out of them, 158 households were still using CWP and they participated in the project survey. Then, out of those 158 households, 123 households joined WCFT. More detail about the project survey design, sampling and result could be found in the project study report and in section D4.

### **Water Consumption Field Test**

The Water Consumption Field Test (WCFT) measures the project-supplied clean water consumption volumes and boiling. The WCFT is conducted with end-users representative of project scenario target population and currently using the CWP.

---

<sup>26</sup> Applicable common sampling approaches are outlined in Section 5, of the Guideline: Sampling and Surveys for CDM Project Activities and Programmes of Activities, Version 04.0 (CDM-EB67-A06-GUID)

Number of person consuming water from the project technology and three volumetric variables are measured:

$N_{p,y}$  Number of person.days consuming water supplied by project scenario p through year y

$Q_{p,y}$  Quantity of safe water in liters consumed in the project scenario p and supplied by CWP per person per day

$Q_{p,rawboil,y}$  Quantity of raw or unsafe water boiled in the project scenario p per person per day

$Q_{p,cleanboil,y}$  Quantity of safe (treated, or from safe supply) water boiled in the project scenario p per person per day

For this monitoring period, WCFT was conducted in conjunction with project and usage survey with the total participants of 123 end-users which is within the recommended sample range between 101 and 137 sample by TPDDTEC 3.0. The below table shows that mean value of number of person consuming water in the household per day and  $Q_{p,y}$  is 4.77 persons and 1.69 liter respectively and its margin of error at 90% level of confidence is lower than 10%. Thus, mean value of both figures are applied in the ER calculation. However, for  $Q_{p,rawboil,y}$  and  $Q_{p,cleanboil,y}$ , with its margin of error at 90% level of confidence being higher than 10%, the upper limit value of  $Q_{p,rawboil,y}$  (0.31 liter) and of  $Q_{p,cleanboil,y}$  (0.02 litre) are used in the ER calculation instead of the mean value for conservativeness based on TPDDTEC 3.0. The details can be found in in section D4 and in the project study report

Description	Number of households	Mean value	Standard deviation	Standard	90% confidence interval:		% margin of error
				Error mean	Lower limit	Upper limit	90/10 rules
Number of people per household	123	4.77	1.84	0.17	4.50	4.41	5.76%
Volume of filtered water consumed per person per day (l/p/d)	123	1.69	1.67	0.06	1.59	1.89	5.89%
Volume of raw water boiled per person per day (l/p/d)	123	0.24	0.49	0.04	0.16	0.60	30.85%
Volume of filtered water boiled per person per day (l/p/d)	123	0.01	0.06	0.01	0.00	0.02	97.31%

### Baseline Water Boiling test (BWBT)

The BWBT is conducted to calculate the quantity of fuel required to purify by boiling one litre of water for 10 minutes using technologies and fuels representative of the baseline

scenario ( $W_{b,y}$ ). The BWBT is conducted using the 90/30 rule for selection of samples, accounting for variability in the types of prevalent baseline technologies. If the monitoring surveys reveal that the same water boiling technologies are prevalent in the baseline and project scenarios,  $W_{b,y}$  and  $W_{p,y}$  are equal. The BWBT should be updated if monitoring surveys show that water boiling technologies change over time.

For this monitoring period, based on the monitoring survey report (Table 21), there is no change for water boiling technologies from that of the baseline: wood and charcoal with traditional cookstove and or improved cookstove; and LPG with LPG stove. Thus, BWBT is not updated.

### **Ongoing monitoring studies: Usage rates, leakage, water quality and Hygiene survey**

#### a) Usage rates

The usage survey provides a single usage parameter that is weighted to be representative of the quantity of project technologies of each age being credited in a given project scenario.

The minimum total sample size is 100, with at least 30 samples for project technologies of each age being credited.

The PP monitors usage in accordance with the monitoring methodology and the Gold Standard "Guidelines for carrying out usage surveys for projects implementing household water filtration technologies".

For this monitoring period, the usage survey was conducted in December 2024 together with project survey for 192 participants that purchased the project technology between 01 July 2019 and 30 June 2024. More detail about the usage survey design and result could be found in section D4 and in the project study report.

#### b) Leakage

The project proponent will conduct a leakage investigation every two years using relevant survey methods that can be combined with monitoring surveys as is applicable.

For this monitoring period, leakage is estimated based on amount of LPG used, diesel, gasoline and LPG consumption at the factory as detail in the ER calculation sheet, tab "leakage".

#### c) Water quality testing

Monitored parameters include the parameters listed above, and also include the parameter of project water quality.

Based on [the rule update dated on 30/06/2022](#) (Application of TPDDTEC Methodology to safe water supply projects), section 2.2.2, PP opts for "water quality test" requirements outlined for parameter SDWS 18 in [Methodology for emission reductions from safe drinking water supply v.1.0](#) - annual water quality test.

Water quality is tested annually and the sample size calculation follow the 90/10 precision rule. PP has developed the sampling water quality test protocol in which a minimum sample size is 35 (greater than that of the minimum 30 of the methodology) and the water samples are taken from the user households at the existing point of the CWP to an accredited laboratory (see the detail in sampling protocol for water quality<sup>27</sup>).

For this monitoring period, PP conducted the water quality from 13<sup>th</sup> to 27<sup>th</sup> February 2024 with the sample size of 45 which is greater than the one proposed in the protocol (35 samples). More detail about the WQT result could be found in the water quality test result and in section D below.

d) Hygiene campaign and survey

PP conducts a general hygiene campaign by attaching it to the sale meeting. PP also conduct hygiene survey in addition to project and usage survey. The survey ask to assess if the users have general hygienic knowledge or not especially on hand washing.

During this monitoring period, 104,774<sup>28</sup> people joined the hygiene campaign. The result of the hygiene survey could be found in the monitoring survey report.

The monitoring tasks undertaken continuously are summarized in below table and the detail are described in the Monitoring flow chart<sup>29</sup>.

No	Description	Team and responsibility
1	Monitoring survey <ul style="list-style-type: none"> <li>- Usage survey</li> <li>- Project survey</li> <li>- Water Consumption Field Test (WCFT)</li> <li>- Water Quality Test</li> </ul>	<ul style="list-style-type: none"> <li>- Hydrologic team: responsible for providing project database serve as sample frame for the survey. HSE also assist in coordination work to support the field survey arrangement during the survey.</li> <li>- Carbon expert (Nexus consultant): responsible for assisting all aspect of monitoring survey including design questionnaire, data collection sheet for WCFT, provide training to consultant for conducting survey.</li> <li>- Consultant firm (third party): responsible for conducting field survey and field test.</li> </ul>
2	Sale database	<ul style="list-style-type: none"> <li>- Hydrologic team: responsible for recording sale data</li> <li>- Carbon expert (Nexus consultant): assist HSE in documenting the sale database properly.</li> </ul>
3	Project database	<ul style="list-style-type: none"> <li>- Hydrologic team: responsible for recording the customer database or project database.</li> </ul>

<sup>27</sup> Sampling protocol for water quality test

<sup>28</sup> HSE-CP2-MP7 Hygiene Campaign

<sup>29</sup> HSE\_CP2-MP7\_ Monitoring\_Flow

		- Carbon expert (Nexus consultant): assist HSE in documenting the project database properly.
--	--	--

**Operation and maintenance of Ceramic Water Purifier (CWP)**

As part of supporting CWP’s operation and maintenance, the project includes brush for cleaning the ceramic pot together with CWP’s user manual in the purchased CWP’s kit. During the sale and hygiene campaign, the hygiene practice and operation and maintenance of CWPs are presented. Furthermore, the project introduced an after-sale service strategy in March 2018 where all field staffs have to do after-sale service including Credit Officer (CO), Clean Water Expert (CWE), Provincial Manager (PM). For example, CO has to check the condition of CWP and explain its operation and maintenance from door to door when they come to collect the instalment from users who purchased CWP via loan.

**Maintenance of a Total Sales Record**

CWP units are sold to domestic and/or institutional end-users. Therefore, as applicable to this project, the Total Sales Record consist of a record of CWP units sold/distributed. The data included:

- Date of Sale
- Quantity of CWP units sold/distributed
- Model/type of CWP sold/distributed
- Invoice number
- Geographic Area of Sale
- Name and telephone number (if available) and address (if feasible)

**Project Database**

The project database is derived from the end-user warranty card where the contact details of end users are recorded. The contact details of end-users are collected as many as commensurate with representative sampling which should not be less than 10 times the survey and field test samples sizes (including usage surveys for each age of product), in order to ensure an adequate end user pool to which random sampling can be applied. The total number of end-users under this project database (01 July 2019 – 30 June 2024) was 94,965 households.

**Quality Assurance and Quality Control**

The project proponent is responsible for accurate and transparent record keeping, monitoring and evaluation. All supporting documentation and records for the project are easily accessible for spot checking and cross referencing by a third party.

The contact information in the project database will allow a project auditor to easily contact and visit end users. Auditors are able to cross-check pertinent project documentation, which will include archives such as production records (i.e. materials purchased, internal logs...) financial accounts and sales records, as well as wholesale customer invoices, observations of retailer activities and sales performance.

Quality control on monitoring survey is strictly monitored, either the survey done by a third party or by Project Proponent, a carbon consultant is hired to guide, advise and check the work quality. The survey or field test must follow its sampling protocol/testing

protocol. The workflow of monitoring survey and its quality control is well elaborated in the monitoring flow chart<sup>30</sup>.

### **Double counting**

As there are other ceramic water filters being sold in Cambodia, there is a risk of potential double counting or including water filters from other organizations into this carbon project.

There are three major actions that will ensure that there is no double counting of water filters:

- 1 - Hydrologic adds a serial number to all water filters produced, these serial numbers are kept in a database;
- 2 - The water filters from Hydrologic look physically different from the other water filters in the market, making it easy to recognize them;
- 3 - Hydrologic will only account for the water filters coming out of their factory, thus removing the risk that other water filters may be double counted.

Furthermore, HSE would like to declare that the project is not creating any other form of environmental credit beside this GS1020 project as stated in the attached declaration<sup>31</sup>.

---

<sup>30</sup> HSE\_CP2-MP7\_ Monitoring\_Flow

<sup>31</sup> Declaration of no double counting of GS1020.

## SECTION D. DATA AND PARAMETERS

### D.1. Data and parameters fixed ex ante or at renewal of crediting period

Relevant SDG Indicator	SDG13.3.1 Number of countries that have integrated mitigation, adaptation, impact reduction and early warning into primary, secondary and tertiary curricula. The total amount of emission reduction is the monitored parameter.
Data/parameter:	$f_{NRB,y}$
Unit	%
Description	Non-renewable biomass ratio
Source of data	CDM Tool 33 Version 02.0
Value(s) applied	30
Choice of data or Measurement methods and procedures	Default value
Purpose of data	Calculation of baseline and project emissions
Additional comment	<p>Per registered methodology TPDDTEC 3.0, this <math>f_{NRB}</math> is fixed by baseline study for a given crediting period, updated, if necessary, as specified in section 3.1. Since the previous <math>f_{NRB}</math> is valid until February 2019, PP has been trying to update this figure in previous MPs, but limit data has prevented this update and PP has opted to use the old figure. However, for CP2-MP4 and CP2-MP5, PP has applied the updated value of <math>f_{NRB}</math> of 95.01% which was proposed by another project (GS751) implemented in Cambodia with the same project boundary (Cambodian nationwide). Then, during the last MP (CP2-MP6), PP has updated <math>f_{NRB}</math> based on the latest available data to be 92.97.</p> <p>However, for this MP, PD voluntarily reduced the <math>f_{NRB}</math> value from 92.97% to 30% -default value of CDM Tool 33. This conservative adjustment serves as a transitional measure prior to adopting the updated <math>f_{NRB}</math> value in the next MP (CP3-MP1), in accordance with the <math>f_{NRB}</math> application rule update for GS4GG dated on 24 April 2025.</p>

Relevant SDG Indicator	SDG13.3.1 Number of countries that have integrated mitigation, adaptation, impact reduction and early warning into primary, secondary and tertiary curricula. The total amount of emission reduction is the monitored parameter.
Data/parameter:	$f_{ff,b,y}$
Unit	%
Description	Fraction of non-renewable fuel for fossil fuels (LPG)
Source of data	AMS III.AV Version 8 (page 11, <a href="https://cdm.unfccc.int/UserManagement/FileStorage/HYBRFAJ97PLO8TZXD1CG2Q643KN5IM">https://cdm.unfccc.int/UserManagement/FileStorage/HYBRFAJ97PLO8TZXD1CG2Q643KN5IM</a> )
Value(s) applied	100%

Choice of data or Measurement methods and procedures	Default from AMS III. AV version 8.
Purpose of data	Calculation of baseline and project emissions
Additional comment	

<b>Relevant Indicator</b>	<b>SDG</b>	SDG13.3.1 Number of countries that have integrated mitigation, adaptation, impact reduction and early warning into primary, secondary and tertiary curricula. The total amount of emission reduction is the monitored parameter.
<b>Data / Parameter:</b>		NCV <sub>b,wood</sub> / NCV <sub>p,wood</sub>
Unit		TJ/ton
Description		Net calorific value of the fuels used in baseline/ project scenario
Source of data		IPCC Guidelines for National Greenhouse Gas Inventories", Volume 2, Energy, Chapter 1, Introduction, Table 1.2, p1.19.
Value(s) applied		0.015
Choice of data or Measurement methods and procedures		Default
Purpose of data		Baseline/Project emission calculations
Additional comment		N/A

<b>Relevant Indicator</b>	<b>SDG</b>	SDG13.3.1 Number of countries that have integrated mitigation, adaptation, impact reduction and early warning into primary, secondary and tertiary curricula. The total amount of emission reduction is the monitored parameter.
<b>Data / Parameter:</b>		NCV <sub>b,LPG</sub> / NCV <sub>p,LPG</sub>
Unit		TJ/ton
Description		Net calorific value of the fuels used (LPG) in baseline/ project scenario
Source of data		IPCC (2006) "IPCC Guidelines for National Greenhouse Gas Inventories", Volume 2, Energy, Chapter 1, Introduction, Table 1.2, p 1.18.
Value(s) applied		0.047
Choice of data or Measurement methods and procedures		Default
Purpose of data		Baseline/Project emission calculations
Additional comment		N/A

<b>Relevant Indicator</b>	<b>SDG</b>	SDG13.3.1 Number of countries that have integrated mitigation, adaptation, impact reduction and early warning into primary, secondary and tertiary curricula. The total amount of emission reduction is the monitored parameter.
<b>Data / Parameter:</b>		Wood to charcoal conversion factor
Unit		factor
Description		Wood to charcoal conversion factor
Source of data		AMS II.G "Energy efficiency measures in thermal applications of non-renewable biomass"
Value(s) applied		6

Choice of data or Measurement methods and procedures	Default
Purpose of data	Baseline/Project emission calculations
Additional comment	N/A

<b>Relevant Indicator</b>	<b>SDG</b>	SDG13.3.1 Number of countries that have integrated mitigation, adaptation, impact reduction and early warning into primary, secondary and tertiary curricula. The total amount of emission reduction is the monitored parameter.
<b>Data / Parameter:</b>		EF <sub>b,wood,CO2</sub> / EF <sub>p,wood,CO2</sub>
Unit		tCO <sub>2</sub> /TJ
Description		CO <sub>2</sub> emission factor arising from use of fuels (wood) in baseline/project scenario
Source of data used		IPCC Guidelines for National Greenhouse Gas Inventories", Volume 2, Energy, Chapter 2, Stationary Combustion, Table 2.5
Value(s) applied		112.00
Choice of data or Measurement methods and procedures		Default
Purpose of data		Baseline/Project emission calculations
Additional comment		N/A

<b>Relevant Indicator</b>	<b>SDG</b>	SDG13.3.1 Number of countries that have integrated mitigation, adaptation, impact reduction and early warning into primary, secondary and tertiary curricula. The total amount of emission reduction is the monitored parameter.
<b>Data / Parameter:</b>		EF <sub>b,wood,nonCO2</sub> / EF <sub>p,wood,nonCO2</sub>
Unit		tCO <sub>2e</sub> /TJ
Description		Non-CO <sub>2</sub> emission factor arising from use of fuels (wood) in baseline/project scenario
Source of data		- For wood emission CH <sub>4</sub> /N <sub>2</sub> O: IPCC Guidelines for National Greenhouse Gas Inventories", Volume 2, Energy, Chapter 2, Stationary Combustion, Table 2.5 - For GWP: RULE UPDATE dated on 03/06/2021: Applicability of global warming potential for gold standard for the global goals project based on AR5.
Value(s) applied		<b>9.46</b> = (Wood Emission Conversion Factor CH <sub>4</sub> * Global Warming Potential Equivalency of CH <sub>4</sub> ) + (Wood Emission Conversion Factor N <sub>2</sub> O * Global Warming Potential Equivalency of N <sub>2</sub> O) = (0.3 tCO <sub>2e</sub> /TJ *28) + (0.004 tCO <sub>2e</sub> /TJ *265) = 9.46tCO <sub>2e</sub> /TJ
Choice of data or Measurement methods and procedures		Default
Purpose of data		Baseline/Project emission calculations
Additional comment		N/A

<b>Relevant Indicator</b>	<b>SDG</b>	SDG13.3.1 Number of countries that have integrated mitigation, adaptation, impact reduction and early warning into primary, secondary and tertiary curricula. The total amount of emission reduction is the monitored parameter.
<b>Data / Parameter:</b>		EF <sub>b,LPG,CO2</sub> / EF <sub>p,LPG,CO2</sub>
Unit		tCO <sub>2</sub> /TJ
Description		CO <sub>2</sub> emission factor arising from use of fuels (LPG) in baseline/project scenario

Source of data used	IPCC (2006) "IPCC Guidelines for National Greenhouse Gas Inventories", Volume 2, Energy, Chapter 2, Stationary Combustion, Table 2.5.
Value(s) applied	63.1
Choice of data or Measurement methods and procedures	Default
Purpose of data	Baseline/Project emission calculations
Additional comment	N/A

<b>Relevant Indicator</b>	<b>SDG</b>	SDG13.3.1 Number of countries that have integrated mitigation, adaptation, impact reduction and early warning into primary, secondary and tertiary curricula. The total amount of emission reduction is the monitored parameter.
<b>Data / Parameter:</b>		$EF_{b,LPG,nonCO2} / EF_{p,LPG,nonCO2}$
Unit		tCO <sub>2</sub> /TJ
Description		Non-CO <sub>2</sub> emission factor arising from use of fuels (LPG) in baseline/project scenario
Source of data used		- IPCC (2006) "IPCC Guidelines for National Greenhouse Gas Inventories", Volume 2, Energy, Chapter 2, Stationary Combustion, Table 2.5 - GWP IPCC AR5
Value(s) applied		0.1665 ((CH <sub>4</sub> =0.005 tCO <sub>2</sub> e/TJ *GWP 28) + (N <sub>2</sub> O=0.0001 tCO <sub>2</sub> e/TJ *GWP 265)) This value is minimal which is negligible in the ER calculation. As a result, it is set to zero in the ER calculation for simplicity.
Choice of data or Measurement methods and procedures		Default
Purpose of data		Baseline/Project emission calculations
Additional comment		N/A

<b>Relevant Indicator</b>	<b>SDG</b>	SDG13.3.1 Number of countries that have integrated mitigation, adaptation, impact reduction and early warning into primary, secondary and tertiary curricula. The total amount of emission reduction is the monitored parameter.
<b>Data / Parameter:</b>		X <sub>boil</sub>
Unit		Percentage
Description		Percentage of premises that in the absence of the project activity would have used non-GHG emitting technologies like chlorine treatment techniques (if available) in the project boundary.
Source of data		Baseline report and C <sub>j</sub> & X <sub>boil</sub> calculation sheet (Please refer HSE_CP2_Cj&X <sub>boil</sub> _20171023).
Value(s) applied		5.80
Choice of data or Measurement methods and procedures		Calculated
Purpose of data		Baseline/Project emission calculations
Additional comment		This value should be updated if ongoing monitoring surveys show that baseline water boiling changes overtime and the data is analyzed in the monitoring report.

<b>Relevant SDG Indicator</b>	SDG13.3.1 Number of countries that have integrated mitigation, adaptation, impact reduction and early warning into primary, secondary and tertiary curricula. The total amount of emission reduction is the monitored parameter.
<b>Data/parameter:</b>	$C_j$
Unit	Percentage
Description	Portion of users of the project technology $j$ who in the baseline were already consuming safe water without boiling it. Premises with a piped water supply can be excluded from the $C_j$ factor when it can be clearly demonstrated that the piped water supply is not a clean water source. Prior to registration, the water quality of the piped water supply should be established as unsafe by carrying out water quality testing over a representative period of time or by referring to relevant third-party studies for the target area. Premised with a piped water supply that boil water or would have boiled water (suppressed demand situation) in the baseline situation are in such cases eligible and can be included in the calculation of baseline emissions from boiling water. PP shall carry out baseline surveys to demonstrate that premises do actually boil water or would indeed have boiled water to make it safe for use.
Source of data	Baseline report and $C_j$ & $X_{boil}$ calculation sheet (Please refer HSE_CP2_Cj&Xboil_20171023).
Value(s) applied	25.97
Choice of data or Measurement methods and procedures	Calculated
Purpose of data	Calculation of baseline/project emissions
Additional comment	Ex ante physical survey by the project participant is not required as the data was publicly available by an independent parties.

<b>Relevant Indicator</b>	<b>SDG</b>	SDG13.3.1 Number of countries that have integrated mitigation, adaptation, impact reduction and early warning into primary, secondary and tertiary curricula. The total amount of emission reduction is the monitored parameter.
<b>Data / Parameter:</b>		<ul style="list-style-type: none"> <li>- <math>W_{b,y,TRAD,wood}</math></li> <li>- <math>W_{p,y,TRAD,wood}</math></li> </ul>
Unit		grams/liter
Description		<ul style="list-style-type: none"> <li>- Quantity of wood required to treat 1 litre of water using traditional stoves in baseline scenario</li> <li>- Quantity of wood required to treat 1 litre of water using traditional stoves in project scenario</li> </ul>
Source of data:		HSE(2019)_MonitoringSurvey_V6Final,Table 54
Value(s) of monitored parameter		<ul style="list-style-type: none"> <li>- 300.38</li> <li>- 300.38</li> </ul>
Choice of data or Measurement methods and procedures		Based on Rule Update -Application of TPDDTEC methodology to SAFE Water Supply projects dated on 30/06/2022, PP choose "Option 2" of conducting field test for determining $W_{b,y,TRAD,wood}$ and $W_{p,y,TRAD,wood}$ . The Baseline Water Boiling Test is conducted to calculate the quantity of fuel required to get one liter of purified water <sup>32</sup> by boiling using technologies and fuels representative of

<sup>32</sup> Purified water by boiling is referred to water which is kept at its boiling point for 10 minutes, after reaching its boiling point.

	the baseline scenario. The calculations are completed by third-party consulting company (Angkor Research: <a href="http://angkorresearch.com/?page=front&amp;lg=en">http://angkorresearch.com/?page=front&amp;lg=en</a> ), as explained in "HSE(2019)_MonitoringSurvey_V6Final" and "HSE HH CP1MP7&CP2MP1 BWBT_Protocol_20190117_EN FINAL".
Purpose of data	Baseline/ Project emission calculations
Additional comment	Instead of using the mean value, the value of lower limit is applied due to the margin of error (36.45%) is greater than that of the tolerated value (30%) based on TPDDTEC 3.0, footnote 63, page 46. The value of this parameter should be updated if ongoing monitoring survey show that baseline water boiling change over time. <i>Based on the monitoring survey report (Table 23), there is no change for water boiling technologies from that of the baseline: wood and charcoal with traditional cookstove and or improved cookstove; and LPG with LPG stove. Thus, BWBT is not updated.</i>

Relevant SDG Indicator	SDG13.3.1 Number of countries that have integrated mitigation, adaptation, impact reduction and early warning into primary, secondary and tertiary curricula. The total amount of emission reduction is the monitored parameter.
Data / Parameter:	- $W_{b,y,TRAD,charcoal}$ - $W_{p,y,TRAD,charcoal}$
Unit	grams/liter
Description	- Charcoal required to treat 1 litre of water using traditional stoves in baseline scenario - Charcoal required to treat 1 litre of water using traditional stoves in project scenario
Source of data	HSE (2019) MonitoringSurvey_V6Final, Table 54
Value(s) applied	- 125.00 (capped value) - 125.00 (capped value)
Choice of data or Measurement methods and procedures	Based on Rule Update -Application of TPDDTEC methodology to SAFE Water Supply projects dated on 30/06/2022, PP choose "Option 2" of conducting field test for determining $W_{b,y,TRAD,charcoal}$ and $W_{p,y,TRAD,charcoal}$ . The Baseline Water Boiling Test is conducted to calculate the quantity of fuel required to get one liter of purified water <sup>33</sup> by boiling using technologies and fuels representative of the baseline scenario. The calculations are completed by third-party consulting company (Angkor Research: <a href="http://angkorresearch.com/?page=front&amp;lg=en">http://angkorresearch.com/?page=front&amp;lg=en</a> ), as explained in "HSE(2019)_MonitoringSurvey_V6Final" and "HSE HH CP1MP7&CP2MP1 BWBT_Protocol_20190117_EN FINAL".
Purpose of data	Baseline/ Project emission calculations
Additional comment	Based on BWBT, the value of $W_{b,y,TRAD,charcoal}$ or $W_{p,y,TRAD,charcoal}$ is 144.5g/l but it is capped to 125g/l based on Based on Rule Update - Application of TPDDTEC methodology to SAFE Water Supply projects dated on 30/06/2022.

Relevant SDG Indicator	- SDG13.3.1 Number of countries that have integrated mitigation, adaptation, impact reduction and early warning into primary, secondary and tertiary curricula. The total amount of emission reduction is the monitored parameter.
Data / Parameter:	- $W_{b,y,IMP,Wood}$

<sup>33</sup> Purified water by boiling is referred to water which is kept at its boiling point for 10 minutes, after reaching its boiling point.

	- $W_{p,y,IMP,Wood}$
Unit	grams/liter
Description	<ul style="list-style-type: none"> <li>- Wood required to treat 1 litre of water using improved cook stove in baseline scenario</li> <li>- Wood required to treat 1 litre of water using improved cook stove in project scenario</li> </ul>
Source of data	HSE(2019)_MonitoringSurvey_V6Final,Table 54
Value(s) applied	<ul style="list-style-type: none"> <li>- 357.7</li> <li>- 357.7</li> </ul>
Choice of data or Measurement methods and procedures	Based on Rule Update -Application of TPDDTEC methodology to SAFE Water Supply projects dated on 30/06/2022, PP choose "Option 2" of conducting field test for determining $W_{b,y,TRAD,wood}$ and $W_{p,y,TRAD,wood}$ . BWBT is conducted to calculate the quantity of fuel required to get one liter of purified water <sup>34</sup> by boiling using technologies and fuels representative of the baseline scenario. The calculations are completed by third-party consulting company (Angkor Research: <a href="http://angkorresearch.com/?page=front&amp;lg=en">http://angkorresearch.com/?page=front&amp;lg=en</a> ), as explained in "HSE(2019)_MonitoringSurvey_V6Final" and "HSE HH CP1MP7&CP2MP1 BWBT_Protocol_20190117_EN FINAL".
Purpose of data	Baseline/ Project emission calculations
Additional comment	$W_{b,y,IMP,wood}$ (357.70g/liter) is greater than that of $W_{b,y,TRAD,wood}$ (300.38g/liter). Theoretically, it should be the opposite ( $W_{b,y,TRAD,Wood} > W_{b,y,IMP,Wood}$ ). However, it is understood that the amount of consumed wood is very much depending on many factors including the type of kitchen (open air, semi open air, closed kitchen), the amount of water boil each time, the old of the stove ...etc. Since in our test there is no control on these parameters (they are based on actual practice at each household); the result could be varying from the theoretical value. In fact, this value is still lower than the cap value of 500g/l of the Rule Update.

<b>Relevant Indicator</b>	<b>SDG</b>	SDG13.3.1 Number of countries that have integrated mitigation, adaptation, impact reduction and early warning into primary, secondary and tertiary curricula. The total amount of emission reduction is the monitored parameter.
<b>Data / Parameter:</b>		<ul style="list-style-type: none"> <li>- <math>W_{b,y,IMP,Charcoal}</math></li> <li>- <math>W_{p,y,IMP,Charcoal}</math></li> </ul>
Unit		grams/liter
Description		<ul style="list-style-type: none"> <li>- Charcoal required to treat 1 litre of water using improved cook stove in baseline scenario</li> <li>- Charcoal required to treat 1 litre of water using improved cook stove in project scenario</li> </ul>
Source of data		HSE(2019)_MonitoringSurvey_V6Final,Table 54
Value(s) applied		<ul style="list-style-type: none"> <li>- 125.00 (Capped value)</li> <li>- 125.00 (Capped value)</li> </ul>
Choice of data or Measurement methods and procedures		Based on Rule Update -Application of TPDDTEC methodology to SAFE Water Supply projects dated on 30/06/2022, PP choose "Option 2" of conducting field test for determining $W_{b,y,IMP,charcoal}$ and $W_{p,y,IMP,charcoal}$ . The Baseline Water Boiling Test is conducted to calculate the quantity of fuel required to get one liter of purified

<sup>34</sup> Purified water by boiling is referred to water which is kept at its boiling point for 10 minutes, after reaching its boiling point.

	water <sup>35</sup> by boiling using technologies and fuels representative of the baseline scenario. The calculations are completed by third-party consulting company (Angkor Research: <a href="http://angkorresearch.com/?page=front&amp;lg=en">http://angkorresearch.com/?page=front&amp;lg=en</a> ), as explained in "HSE(2019)_MonitoringSurvey_V6Final" and "HSE HH CP1MP7&CP2MP1 BWBT_Protocol_20190117_EN FINAL".
Purpose of data	Baseline/ Project emission calculations
Additional comment	Based on BWBT, the value of $W_{b,y,IMP,charcoal}$ or $W_{p,y,IMP,charcoal}$ is 179.8g/l but it is capped to 125g/l based on Rule Update - Application of TPDDTEC methodology to SAFE Water Supply projects dated on 30/06/2022.

Relevant SDG Indicator	SDG13.3.1 Number of countries that have integrated mitigation, adaptation, impact reduction and early warning into primary, secondary and tertiary curricula. The total amount of emission reduction is the monitored parameter.
Data / Parameter:	<ul style="list-style-type: none"> <li>- <math>W_{b,y,LPG(small)}</math></li> <li>- <math>W_{p,y,LPG(small)}</math></li> </ul>
Unit	grams/liter
Description	<ul style="list-style-type: none"> <li>- LPG required to treat 1 litre of water using LPG stove (small) in baseline scenario</li> <li>- LPG required to treat 1 litre of water using LPG stove (small) in project scenario</li> </ul>
Source of data	HSE(2019)_MonitoringSurvey_V6Final,Table 54 and Rule Update
Value(s) applied	<ul style="list-style-type: none"> <li>- 30.00 (capped value)</li> <li>- 30.00 (capped value)</li> </ul>
Choice of data or Measurement methods and procedures	Based on Rule Update -Application of TPDDTEC methodology to SAFE Water Supply projects dated on 30/06/2022, PP choose "Option 2" of conducting field test for determining $W_{b,y,LPG(small)}$ and $W_{p,y,LPG(small)}$ . The Baseline Water Boiling Test is conducted to calculate the quantity of fuel required to get one liter of purified water <sup>36</sup> by boiling using technologies and fuels representative of the baseline scenario. The calculations are completed by third-party consulting company (Angkor Research: <a href="http://angkorresearch.com/?page=front&amp;lg=en">http://angkorresearch.com/?page=front&amp;lg=en</a> ), as explained in "HSE(2019)_MonitoringSurvey_V6Final" and "HSE HH CP1MP7&CP2MP1 BWBT_Protocol_20190117_EN FINAL".
Purpose of data	Baseline/ Project emission calculations
Additional comment	Based on BWBT, the value of $W_{b,y,LPG(small)}$ or $W_{p,y,LPG(small)}$ is 31.2g but based on Rule Update -Application of TPDDTEC methodology to SAFE Water Supply projects dated on 30/06/2022. The capped value of LPG can be derived from the capped value of woody biomass of 500g equivalent terms. As a result, capped value for LPG is estimated to be 30g. Capped LPG = Default value of LPG/Default value of Woody biomass * Capped value of woody biomass $= (24g/400g * 500g) = 30g$

<sup>35</sup> Purified water by boiling is referred to water which is kept at its boiling point for 10 minutes, after reaching its boiling point.

<sup>36</sup> Purified water by boiling is referred to water which is kept at its boiling point for 10 minutes, after reaching its boiling point.

<b>Relevant Indicator</b>	<b>SDG</b>	SDG13.3.1 Number of countries that have integrated mitigation, adaptation, impact reduction and early warning into primary, secondary and tertiary curricula. The total amount of emission reduction is the monitored parameter.
<b>Data / Parameter:</b>		<ul style="list-style-type: none"> <li>- <math>W_{b,y,LPG(Large)}</math></li> <li>- <math>W_{p,y,LPG(Large)}</math></li> </ul>
Unit		grams/liter
Description		<ul style="list-style-type: none"> <li>- LPG required to treat 1 litre of water using LPG stove (large) in baseline scenario</li> <li>- LPG required to treat 1 litre of water using LPG stove (large) in project scenario.</li> </ul>
Source of data		HSE_CP2-MP1_ER_Cal_V3.0_20190703, Tab: Core Data, Cell F55.
Value(s) applied		<ul style="list-style-type: none"> <li>- 15.11</li> <li>- 15.11</li> </ul>
Choice of data or Measurement methods and procedures		<p>The quantity of LPG (in tonnes) required to treat one litre of water = <math>SEC/[NCV\_LPG*Conversion\ factor\ (TJ\ to\ kJ)]</math> (1)</p> <p>Where:</p> <ul style="list-style-type: none"> <li>- SEC: Specific energy consumption required to boil one litre of water by using LPG stove = To be determined</li> <li>- NCV_LPG: net calorific value of LPG = 0.047 TJ/tonne (IPCC (2006) "IPCC Guidelines for National Greenhouse Gas Inventories", Volume 2, Energy, Chapter 1, Introduction, Table 1.2, p 1.18)</li> <li>- Conversion factor TJ to kJ = 1000,000,000</li> </ul> <p>Based on CDM methodology AMS III.AV Version 5, SEC can be calculated as following:</p> $SEC = [WH \times (T_f - T_i) + 0.01 \times WHE] / \eta_{wb} \quad (2)$ <p>Where:</p> <ul style="list-style-type: none"> <li>- WH: Specific heat of water (kJ/L°C), default value of 4.186 kJ/L °C</li> <li>- Tf: Final temperature (°C). Use a default value of 100 °C</li> <li>- Ti: Initial temperature (°C). Use a default value of 20 °C</li> <li>- WHE latent heat of water evaporation. Use a default value of 2260kJ/L.</li> <li>- <math>\eta_{wb}</math>, LPG: Efficiency of the water boiling systems being replaced. In case of LPG, the default value is 0.5.</li> </ul> <p>By substituting all the known parameter into equation (2)</p> $SEC = [4.186\ kJ/L\ ^\circ C * (100\ ^\circ C - 20\ ^\circ C) + 0.01 * 2260\ kJ/L] / 0.5 = 714.96\ kJ/L$ <p>Substituting SEC into equation (1)</p> <p>The quantity of LPG (in tonnes) required to treat one litre of water = <math>714.96kJ/L / (0.047TJ/tonne * 10^9)</math></p> <p>The quantity of LPG required to treat one litre of water = 0.00001511 tonnes/litre = <b>15.11 grams/litre.</b></p>
Purpose of data		Baseline/ Project emission calculations
Additional comment		As stated in the BWBT protocol, the test requires to weight the LPG container. So, it is not possible to do so because the container is attached to the stove and the user do not allow the survey team to detach it because they are afraid of leakage. Therefore, PP has used the value from the theoretical calculation (15.11 grams/liter) which is more conservation than that of the field test (31.2 grams/liter).
Relevant SDG Indicator		SDG13.3.1 Number of countries that have integrated mitigation, adaptation, impact reduction and early warning into primary,

	secondary and tertiary curricula. The total amount of emission reduction is the monitored parameter.
Data / Parameter:	$W_{b,y,WEIGHTED,wood}$
Unit	Tonnes
Description	Wood used by technologies representative of baseline scenario b during project year y, as per Baseline Water Boiling Test.
Source of data	Rule Update -Application of TPDDTEC methodology to SAFE Water Supply projects dated on 30/06/2022; Baseline fuel mix and calculation.
Value(s) applied	0.000211
Choice of data or Measurement methods and procedures	The formula used to reach this figure is: $W_{b,y,TRAD,wood} * \% \text{ of Traditional Stove Users with wood in the baseline} + W_{b,y,IMP,wood} * \% \text{ of Improved Stove Users with wood in the baseline} = W_{b,y,WEIGHTED,wood}$ 0.000358 tonnes* 0.5693 + 0.0003 * 0.1126 tonnes = 0.000211 tonnes Note: - $W_{b,y,TRAD,wood}$ and $W_{b,y,IMP,wood}$ are from the above mentioned value. - % of Traditional Stove Users with wood in the baseline and % of Improved Stove Users with wood in the baseline are taken from the baseline survey and stated in the below table.
Purpose of data	Baseline/ Project emission calculations
Additional comment	

Relevant SDG Indicator	SDG13.3.1 Number of countries that have integrated mitigation, adaptation, impact reduction and early warning into primary, secondary and tertiary curricula. The total amount of emission reduction is the monitored parameter.
Data / Parameter:	% of Traditional Stove Users with wood in the baseline
Unit	%
Description	Percentage of Traditional Stove Users with wood in the baseline
Source of data	- Baseline study - HSECP2_Baseline Stove-Fuel Mix Simplification20170921, Tab Final table ER Calc, Cell D7
Value(s) applied	56.93
Choice of data or Measurement methods and procedures	Result from the baseline study conducted in 2017
Purpose of data	Baseline emission calculations
Additional comment	NA

Relevant SDG Indicator	SDG13.3.1 Number of countries that have integrated mitigation, adaptation, impact reduction and early warning into primary, secondary and tertiary curricula. The total amount of emission reduction is the monitored parameter.
Data / Parameter:	% of Improved Stove Users with wood in the baseline
Unit	%
Description	Percentage of Improved Stove Users with wood in the baseline
Source of data	- Baseline study - HSECP2_Baseline Stove-Fuel Mix Simplification20170921, Tab Final table ER Calc, Cell C7
Value(s) applied	11.26
Choice of data or Measurement methods and procedures	Result from the baseline study conducted in 2017
Purpose of data	Baseline emission calculations

Additional comment	NA
Relevant SDG Indicator	SDG13.3.1 Number of countries that have integrated mitigation, adaptation, impact reduction and early warning into primary, secondary and tertiary curricula. The total amount of emission reduction is the monitored parameter.
Data / Parameter:	$W_{b,y,WEIGHTED,charcoal}$
Unit	Tonnes
Description	Weighted Average of charcoal quantity in kg required to treat 1 litre of water using technologies representative of baseline scenario b during project year y
Source of data	Default value based on Rule Update -Application of TPDDTEC methodology to SAFE Water Supply projects dated on 03/05/2021 and Baseline fuel mix
Value(s) applied	0.000008
Choice of data or Measurement methods and procedures	The formula used to reach this figure is: $W_{b,y,TRAD,charcoal} * \% \text{ of Traditional Stove Users with charcoal in the baseline} + W_{b,y,IMP,Charcoal} * \% \text{ of Improved Stove Users with charcoal in the baseline} = W_{b,y,WEIGHTED,charcoal}$ $0.000125 \text{ tonnes} * 0.0519 + 0.0001 \text{ tonnes} * 0.0087 = 0.000008 \text{ tonnes}$ Note: <ul style="list-style-type: none"> <li>- <math>W_{b,y,TRAD,charcoal}</math> and <math>W_{b,y,IMP,Charcoal}</math> are from Rule Update as mentioned above.</li> <li>- % of Traditional Stove Users with charcoal in the baseline and % of Improved Stove Users with charcoal in the baseline are taken from the baseline survey (HSECP2_Baseline Stove-Fuel Mix Simplification20170921, Tab Final Table ER Calc, Cell D8).</li> </ul>
Purpose of data	Baseline/ Project emission calculations
Additional comment	NA

Relevant SDG Indicator	SDG13.3.1 Number of countries that have integrated mitigation, adaptation, impact reduction and early warning into primary, secondary and tertiary curricula. The total amount of emission reduction is the monitored parameter.
Data / Parameter:	% of Traditional Stove Users with charcoal in the baseline
Unit	%
Description	Percentage of Traditional Stove Users with charcoal in the baseline
Source of data	<ul style="list-style-type: none"> <li>- Baseline study</li> <li>- HSECP2_Baseline Stove-Fuel Mix Simplification20170921, Tab Final Table ER Calc, Cell D8</li> </ul>
Value(s) applied	5.19
Choice of data or Measurement methods and procedures	Result from the baseline study conducted in 2017
Purpose of data	Baseline emission calculations
Additional comment	NA

Relevant SDG Indicator	SDG13.3.1 Number of countries that have integrated mitigation, adaptation, impact reduction and early warning into primary, secondary and tertiary curricula. The total amount of emission reduction is the monitored parameter.
Data / Parameter:	% of Improved Stove Users with charcoal in the baseline
Unit	%
Description	Percentage of Improved Stove Users with charcoal in the baseline
Source of data	<ul style="list-style-type: none"> <li>- Baseline study</li> </ul>

	- HSECP2_Baseline Stove-Fuel Mix Simplification20170921, Tab Final Table ER Calc, Cell C8
Value(s) applied	0.87
Choice of data or Measurement methods and procedures	Result from the baseline study conducted in 2017
Purpose of data	Baseline emission calculations
Additional comment	NA

<b>Relevant Indicator</b>	<b>SDG</b>	SDG13.3.1 Number of countries that have integrated mitigation, adaptation, impact reduction and early warning into primary, secondary and tertiary curricula. The total amount of emission reduction is the monitored parameter.
<b>Data / Parameter:</b>		$W_{b,y,WEIGHTED,LPG}$
Unit		Tonnes
Description		Average weighted quantity of LPG required to treat 1 litre of water using technologies representative of baseline scenario b during project year y
Source of data		Rule Update as mentioned above and Baseline fuel mix
Value(s) applied		0.0000043
Choice of data or Measurement methods and procedures		<p>The formula used to reach this figure is:</p> $[W_{b,y,LPG(small)} * \% \text{ of small LPG stove usage in baseline scenario} + W_{b,y,LPG(Large)} * \% \text{ of Large LPG stove usage in baseline scenario}] * \% \text{ of LPG stove usage in the baseline scenario} = W_{b,y,WEIGHTED,LPG}$ $[0.000030 \text{ tonnes} * 0.44 + 0.00001511 \text{ tonnes} * 0.56] * 0.1991 = 0.0000043 \text{ tonnes}$ <p>Note:</p> <ul style="list-style-type: none"> <li>- <math>W_{b,y,LPG(small)}</math> and <math>W_{b,y,LPG(Large)}</math> are stated above</li> <li>- <math>\% \text{ of small LPG stove usage in baseline scenario}</math> is from the monitoring survey conducted in 2019 as mentioned below.</li> <li>- <math>\% \text{ of Large LPG stove usage in baseline scenario}</math> from the monitoring survey conducted in 2019 as mentioned below</li> <li>- <math>\% \text{ of LPG stove usage in the baseline scenario}</math> is from the baseline survey.</li> </ul>
Purpose of data		Baseline/ Project emission calculations
Additional comment		<p>Please note that the share of <i>small LPG stove</i> and that of <i>Large LPG stove</i> usage in the baseline scenario were not anticipated in the baseline survey. All LPG users were considered as only one type of LPG stove user in the baseline survey. However, due to the complexity of conducting the water boiling test with LPG large stove, PP could conduct the test for only small LPG stove type as explain in the above <math>W_{b,y,LPG(Large)}</math> section.</p> <p>During the monitoring survey conducted in 2019, the share of small and large LPG stove was estimated. This share is used for baseline scenario because it is the closest survey to that of the baseline. This is considered as a conservative approach because it is understood that the share of household using large LPG stove in the actual baseline scenario is smaller than that of the project scenario. It is believed that the share of large LPG stove use is proportional to the better household economic status. With the average GDP growth rate of 7.6 % for the last decade (<a href="https://www.worldbank.org/en/country/cambodia">https://www.worldbank.org/en/country/cambodia</a>), the household socio-economic is also expected to be better year by year.</p>

Relevant SDG Indicator	SDG13.3.1 Number of countries that have integrated mitigation, adaptation, impact reduction and early warning into primary,
------------------------	---

	secondary and tertiary curricula. The total amount of emission reduction is the monitored parameter.
Data / Parameter	% of LPG stove usage in the baseline scenario
Unit	%
Description	Percentage of LPG stove in baseline scenario
Source of data	- Baseline survey - HSECP2_Baseline Stove-Fuel Mix Simplification20170921, Tab Final Table ER Calc, Cell C9
Value(s) applied	19.91
Choice of data or Measurement methods and procedures	Result from the baseline survey conducted in 2017
Purpose of data	Baseline emission calculations
Additional comment	NA

<b>Relevant SDG Indicator</b>	SDG13.3.1 Number of countries that have integrated mitigation, adaptation, impact reduction and early warning into primary, secondary and tertiary curricula. The total amount of emission reduction is the monitored parameter.
<b>Data / Parameter:</b>	% of <i>small LPG</i> stove usage in baseline scenario
Unit	%
Description	Percentage of <i>small LPG</i> stove usage in baseline scenario
Source of data	- HSE(2019)_MonitoringSurvey_V6Final, page 37
Value(s) applied	44
Choice of data or Measurement methods and procedures	Result from the monitoring survey conducted in 2019
Purpose of data	Baseline emission calculations
Additional comment	Please note that the share of <i>small LPG</i> stove and that of <i>Large LPG</i> stove usage in the baseline scenario were not anticipated in the baseline survey. All LPG users were considered as only one type of LPG stove user in the baseline survey. However, due to the complexity of conducting the water boiling test with LPG large stove, PP could conduct the test for only small LPG stove type as explain in the above $W_{b,y,LPG(Large)}$ section. During the monitoring survey conducted in 2019, the share of small and large LPG stove was estimated. This share is used for baseline scenario because it is the closest survey to that of the baseline. This is considered as a conservative approach because it is understood that the share of household using large LPG stove in the actual baseline scenario is smaller than that of the project scenario. It is believed that the share of large LPG stove use is proportional to the better household economic status. With the average GDP growth rate of 7.6 % for the last decade ( <a href="https://www.worldbank.org/en/country/cambodia">https://www.worldbank.org/en/country/cambodia</a> ), the household socio-economic is also expected to be better year by year.

Relevant SDG Indicator	SDG13.3.1 Number of countries that have integrated mitigation, adaptation, impact reduction and early warning into primary, secondary and tertiary curricula. The total amount of emission reduction is the monitored parameter.
Data / Parameter:	% of large LPG stove usage in baseline scenario
Unit	%
Description	Percentage of large LPG stove usage in baseline scenario
Source of data	HSE(2019)_MonitoringSurvey_V6Final, page 37
Value(s) applied	56

Choice of data or Measurement methods and procedures	Result from the monitoring survey conducted in 2019
Purpose of data	Baseline emission calculations
Additional comment	<p>Please note that the share of small LPG stove and that of Large LPG stove usage in the baseline scenario were not anticipated in the baseline survey. All LPG users were considered as only one type of LPG stove user in the baseline survey. However, due to the complexity of conducting the water boiling test with LPG large stove, PP could conduct the test for only small LPG stove type as explained in the above <math>W_{b,y,LPG(Large)}</math> section.</p> <p>During the monitoring survey conducted in 2019, the share of small and large LPG stove was estimated. This share is used for baseline scenario because it is the closest survey to that of the baseline. This is considered as a conservative approach because it is understood that the share of household using large LPG stove in the actual baseline scenario is smaller than that of the project scenario. It is believed that the share of large LPG stove use is proportional to the better household economic status. With the average GDP growth rate of 7.6 % for the last decade (<a href="https://www.worldbank.org/en/country/cambodia">https://www.worldbank.org/en/country/cambodia</a>), the household socio-economic is also expected to be better year by year.</p>

Relevant SDG Indicator	SDG15.1.1 Forest area as a proportion of total land area.
Data / Parameter:	Growth stock in forest
Unit	Tonne/Hectare
Description	Growth stock in forest in Cambodia
Source of data	<ul style="list-style-type: none"> <li>- Cambodia growing stock (94m<sup>3</sup>/ha): Global Forest Resources Assessment 2015, Page 79, Table 13 Growing stock in forest and other wooded land 2015</li> <li>- Converting factor from m<sup>3</sup> of wood to tonne (1.725 tonne/m<sup>3</sup>): Chapter 3: LUCF sector Good Practice Guidance IPCC 2006, page 12</li> </ul>
Value(s) applied	162.15
Choice of data or Measurement methods and procedures	<p>= Cambodia growth stock in forest (m<sup>3</sup>/ha) * Converting factor from m<sup>3</sup> of wood to tonne of wood.</p> <p>= 94 m<sup>3</sup>/ha*1.725 tonne/m<sup>3</sup>=162.15 tonne/hectare</p>
Purpose of data	Calculation of baseline and project emissions
Additional comment	

D.2. Data and parameters monitored

<b>Relevant SDG Indicator</b>	<ul style="list-style-type: none"> <li>- SDG 1.1.1 Proportion of population below the international poverty line, by sex, age, employment status and geographical location (urban/rural). Three parameters were selected to be monitored for this indicator: - The amount of fuel save, Percentage of household noted on money save and Percentage of household noted on time save after using the project technology.</li> <li>- SDG 13.3.1 Number of countries that have integrated mitigation, adaptation, impact reduction and early warning into primary, secondary and tertiary curricula. The total amount of emission reduction is the monitored parameter.</li> </ul>
<b>Data / Parameter:</b>	T <sub>p,y</sub>
<b>Unit</b>	CWPs
<b>Description</b>	Total distributed water purifier (CWP) units
<b>Measured/calculated/default</b>	Recorded
<b>Source of data</b>	<ul style="list-style-type: none"> <li>- Unit sold during this CP2-MP7: Sales Records</li> <li>- Cumulative units sold up to 30 Nov 2024: ER spread sheet "tab Units_month, sum (E6:E173)"</li> <li>- Cumulatively credited units over CP2-MP7 "ER spread sheet, tab Units_month, cell H173"</li> </ul>
<b>Value(s) of monitored parameter</b>	<ul style="list-style-type: none"> <li>- 31,945 units (number of units sold during CP2-MP7)</li> <li>- 586,531 units (cumulative units sold up to 30 Nov 2024)</li> <li>- 156,304 units (cumulatively credited units over CP2-MP7)</li> </ul>
<b>Monitoring equipment</b>	Data record
<b>Measuring/reading/recording frequency:</b>	Monthly
<b>Calculation method (if applicable):</b>	It should be noted that the total distributed water purifiers are calculated by summing up all the sale made from the start of the project up to 30 Nov 2024. However, for ER calculation, those total distributed CWPs should be converted into "cumulatively credited units" by subtracted with CWPs that are older than five years old as shown in "ER spread sheet, tab Units_month, cell H173".
<b>QA/QC procedures:</b>	Data comes from 3 sales channels: direct, retail, and NGO sales. The finance department ensures that all sales numbers are accurate by reconciling sales data with payments, and entering the sales into their accounting system, Peachtree. The Carbon Project Officer at Nexus verifies those monthly sales data and enters them into the ER spreadsheet. See "HSE_CP2-MP7_Sales_Database" for the summary sales per month. All sales data are available on request to the VVB. Also, see "HSE_CP2MP7_Monitoring_Flow"
<b>Purpose of data:</b>	Baseline/Project emissions calculations
<b>Additional comment:</b>	N/A

<b>Relevant SDG Indicator</b>	- 1.1.1 Proportion of population below the international poverty line, by sex, age, employment status and geographical location (urban/rural). Three parameters were selected to be monitored for this indicator: - The amount of fuel save, Percentage of
-------------------------------	--

	household noted on money save and Percentage of household noted on time save after using the project technology. - 6.1.1 Proportion of population using safely managed drinking water services. The number of people with access to safe drinking water is the monitored parameter. - 13.3.1 Number of countries that have integrated mitigation, adaptation, impact reduction and early warning into primary, secondary and tertiary curricula. The total amount of emission reduction is the monitored parameter																												
<b>Data / Parameter:</b>	U <sub>p,y</sub>																												
Unit	%																												
Description	Weighted average usage rate																												
Measured/calculated/default	Calculated																												
Source of data	Monitoring survey report and ER spread sheet tab "Usage Rate Calc, cell U13".																												
Value(s) of monitored parameter	80.76																												
Monitoring equipment	Survey questionnaire and observation																												
Measuring/reading/recording frequency:	Annually																												
Calculation method (if applicable):	<p>Weighted average usage rate is calculated based on usage rate of each age group of 186 samples and its corresponding sale. The detail calculation can be found in ER spread sheet tab "Usage Rate Calc, cell U12".            Based on the usage survey, the usage rate per age group are as following:</p> <table border="1" data-bbox="587 1115 1449 1467"> <thead> <tr> <th>Age Group</th> <th>Frequency</th> <th>Currently Use</th> <th>Percentage %</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>43</td> <td>41</td> <td>95.35%</td> </tr> <tr> <td>2</td> <td>38</td> <td>35</td> <td>92.11%</td> </tr> <tr> <td>3</td> <td>42</td> <td>36</td> <td>85.71%</td> </tr> <tr> <td>4</td> <td>33</td> <td>25</td> <td>75.76%</td> </tr> <tr> <td>5</td> <td>36</td> <td>21</td> <td>58.33%</td> </tr> <tr> <td>Total:</td> <td>186</td> <td>154</td> <td>*82.29%</td> </tr> </tbody> </table> <p>* Note: 82.80% is a non-weighted average. The weighted average is estimated to be 80.76% (see detail in the above source data).</p>	Age Group	Frequency	Currently Use	Percentage %	1	43	41	95.35%	2	38	35	92.11%	3	42	36	85.71%	4	33	25	75.76%	5	36	21	58.33%	Total:	186	154	*82.29%
Age Group	Frequency	Currently Use	Percentage %																										
1	43	41	95.35%																										
2	38	35	92.11%																										
3	42	36	85.71%																										
4	33	25	75.76%																										
5	36	21	58.33%																										
Total:	186	154	*82.29%																										
QA/QC procedures:	The survey was carried out by a third-party (ACS consulting company). The data were collected by using a computer-assisted personal interview (CAPI) and the data quality control was made both at field and office. The final dataset was cleaned by the research consultant before analyzing. It should be noted that all the data was recorded and analyzed in SPSS (statistic software) and Microsoft Excel. The analysis results are arranged in spreadsheet for better reference.																												
Purpose of data:	Baseline and project emission calculations																												
Additional comments:	N/A																												

Relevant SDG Indicator	<ul style="list-style-type: none"> <li>- 3.9.1 Mortality rate attributed to household and ambient air pollution. The number of people who notice less smoke in kitchen after having water filter is the monitored parameter.</li> <li>- 6.1.1 Proportion of population using safely managed drinking water services. The number of people with access to safe drinking water is the monitored parameter.</li> <li>- 13.3.1 Number of countries that have integrated mitigation, adaptation, impact reduction and early warning into primary, secondary and tertiary curricula. The total amount of emission reduction is the monitored parameter</li> </ul>
Data / Parameter:	WQ <sub>Passed,y</sub>
Unit	%
Description	Water quality passing rate of water quality standard (WHO standard) per year
Measured/calculated/default	Calculated
Source of data	Water Quality test results
Value(s) of monitored parameters	93.33
Monitoring equipment	Laboratory test
Measuring/reading/recording frequency:	Annually
Calculation method (if applicable):	Based on the updated rule - Application of TPDDTEC methodology to safe water supply projects released on 30/06/2022, PP opts for "water quality test" requirements outlined for parameter SDWS 18 in <a href="#">Methodology for emission reductions from safe drinking water supply v.1.0</a> - annual water quality test.
QA/QC procedures:	PP has contracted a 3 <sup>rd</sup> party -consulting company to develop a sampling protocol <sup>37</sup> which follow the 90/10 rule. Based on this protocol, PP has conducted water quality test survey at the end-user point with the sample of 45 households (above minimum sample size of 30 required by SDWS 18) by taking the water sample that exists the treatment technology (CWP) to 3 <sup>rd</sup> party laboratory (Institut Pasteur du Cambodge <sup>38</sup> which operates under the senior patronage of the Cambodia Ministry of Health (MoH)). The result from the water quality surveys conducted in February and March 2024 showed that 93.33% <sup>39</sup> of surveyed households' water quality pass WHO standard for drinking water (E.Coli <1 per 100ml). This mean only 6.67% does not meet the water quality standard which is below the threshold of 10% per SDWS 18 requirement. Furthermore, it should be noted that there is no national standard for water quality from household water treatment technology in Cambodia, thus, WHO standard is used (see detail discussion in water quality sampling protocol).
Purpose of data:	Baseline/Project emission calculations
Additional comment:	N/A

<sup>37</sup> HSE\_CP2-MP7\_WQ\_protocol

<sup>38</sup> <https://www.pasteur-kh.org/about-us/>

<sup>39</sup> HSE\_CP2-MP7\_Water\_Quality\_Result

<b>Relevant SDG Indicator</b>	- 3.9.1 Mortality rate attributed to household and ambient air pollution. The number of people who notice less smoke in kitchen after having water filter is the monitored parameter. - 6.1.1 Proportion of population using safely managed drinking water services. The number of people with access to safe drinking water is the monitored parameter. - 13.3.1 Number of countries that have integrated mitigation, adaptation, impact reduction and early warning into primary, secondary and tertiary curricula. The total amount of emission reduction is the monitored parameter
<b>Data / Parameter:</b>	Hygiene Campaigns
Unit	Number of people
Description	Number of people attends the meeting in which Hygiene issue were explained
Measured/calculated/default	Records
Source of data	Record from meetings "HSE-CP2MP7_Hygiene_Campaign"
Value(s) of monitored parameter	104,774
Monitoring equipment	NA
Measuring/reading/recording frequency:	Annually
Calculation method (if applicable):	Records
QA/QC procedures:	Data are coming from the attendant list of the people attending the meeting
Purpose of data:	Monitoring on the hygiene activities
Additional comment:	N/A

<b>Relevant SDG Indicator</b>	- 3.9.1 Mortality rate attributed to household and ambient air pollution. The number of people who notice less smoke in kitchen after having water filter is the monitored parameter. - 6.1.1 Proportion of population using safely managed drinking water services. The number of people with access to safe drinking water is the monitored parameter. - 13.3.1 Number of countries that have integrated mitigation, adaptation, impact reduction and early warning into primary, secondary and tertiary curricula. The total amount of emission reduction is the monitored parameter.
<b>Data / Parameter:</b>	$N_{p,y}$
Unit	Person.days
Description	Number of person.days consuming water supplied by project scenario p through year y.
Measured/calculated/default	Calculated
Source of data	Water Consumption Field Test (WCFT)
Value(s) of monitored parameter	1,597.95
Monitoring equipment	Questionnaire and testing
Measuring/reading/recording frequency:	Before first verification of each crediting period and every two years for the sequential monitoring period
Calculation method (if applicable):	Total of person.days = number of days in use (335) * number of units per household (1) * number of persons consuming water per household per day (4.77) = 1,597.95 persons/unit.

QA/QC procedures:	Data collected during the tests were collected over a four-day period, this information was recorded on the tablet-base data collection systems. Following the encoding process, the analysis was led by experienced consultant and the final results was then validated by the Carbon Project Manager at Nexus. See "HSE_CP2-MP7_2025_US-PS-WCFT_V3.0, Table 35". Data analysis sheet is available on request to the VVB.
Purpose of data:	Calculation of baseline/project emission
Additional comment:	N/A.

<b>Relevant SDG Indicator</b>	<ul style="list-style-type: none"> <li>- 1.1.1 Proportion of population below the international poverty line, by sex, age, employment status and geographical location (urban/rural). Three parameter were selected to be monitored for this indicator: - The amount of fuel save, Percentage of household noted on money save and Percentage of household noted on time save after using the project technology.</li> <li>- 13.3.1 Number of countries that have integrated mitigation, adaptation, impact reduction and early warning into primary, secondary and tertiary curricula. The total amount of emission reduction is the monitored parameter.</li> <li>- 15.1.1 Forest area as a proportion of total land area. Area of forest save is the monitored parameter.</li> </ul>
<b>Data / Parameter:</b>	Q <sub>p,y</sub>
Unit	Litres/person/day
Description	Quantity of purified water consumed in the project scenario p per person per day
Measured/calculated/default	Measured
Source of data	Water Consumption Field Test (WCFT)
Value(s) of monitored parameter	1.69
Monitoring equipment	Analog scale is used to weight the water consumption per day. The verification of calibration of scale was conducted by checking its accuracy against the standard weight. Only scale that passed this verification are utilized in the test. The details of this scale's verification can be found in "ACS_HSE-Calibration&Inventory_2024_EN".
Measuring/Reading/Recording frequency:	Before first verification of each crediting period and every two years for the sequential monitoring period
Calculation method (if applicable):	The detail calculation can be found in "HSE_CP2-MP7_2025_US-PS-WCFT_V3.0, Table 35" and "HSE_CP2-MP7_WCFT_Protocol(EN)_Final".
QA/QC procedures:	Data collected during the tests were collected over a four-day period, this information was recorded on the tablet-base data collection systems. Following the encoding process, the analysis was led by experienced consultant and the final results was then validated by the Carbon Project Manager at Nexus. See "HSE_CP2-MP7_2025_US-PS-WCFT_V3.0,Table 35". Data analysis sheet is available on request to the VVB.
Purpose of data:	Calculation of ER.
Additional comment;	N/A

Relevant SDG Indicator	- 1.1.1 Proportion of population below the international poverty line, by sex, age, employment status and
------------------------	---

	<p>geographical location (urban/rural). Three parameters were selected to be monitored for this indicator: - The amount of fuel save, Percentage of household noted on money save and Percentage of household noted on time save after using the project technology.</p> <p>- 13.3.1 Number of countries that have integrated mitigation, adaptation, impact reduction and early warning into primary, secondary and tertiary curricula. The total amount of emission reduction is the monitored parameter.</p> <p>- 15.1.1 Forest area as a proportion of total land area. Area of forest save is the monitored parameter.</p>
Data / Parameter:	$Q_{p,rawboil,y}$
Unit	Litres/person/day
Description	The raw or unsafe water that is still boiled after installation of the CWP
Measured/calculated/default	Measured
Source of data	Water Consumption Field Test (WCFT)
Value(s) of monitored parameter	0.31
Monitoring equipment	Analog scale is used to weight the volume of raw water boiled per person per day. The verification of calibration of scale was conducted by checking its accuracy against the standard weight. Only scale that passed this verification are utilized in the test. The details of this scale’s verification can be found in “ACS_HSE-Calibration&Inventory_2024_EN”.
Measuring/reading/recording frequency:	Before first verification of each crediting period and every two years for the sequential monitoring period
Calculation method (if applicable):	The detail calculation can be found in “HSE_CP2-MP7_2025_US-PS-WCFT_V3.0, Table 35” and “HSE_CP2-MP7_WCFT_Protocol(EN)_Final”.
QA/QC procedures:	Data collected during the tests were collected over a four-day period, this information was recorded on the tablet-base data collection systems. Following the encoding process, the analysis was led by experienced consultant and the final results was then validated by the Carbon Project Manager at Nexus. See “HSE_CP2-MP7_2025_US-PS-WCFT_V3.0, Table 35”. Data analysis sheet is available on request to the VVB.
Purpose of data:	Calculation of ER.
Additional comment:	Due to the margin of error (30.85% is greater than 10% (90/10 rule), the upper limit value (0.31 liter) is used instead of mean value (0.24 liter) for conservativeness as stated in TPDDTEC V3.0, footnote 21.

Relevant SDG Indicator	<ul style="list-style-type: none"> <li>- 1.1.1 Proportion of population below the international poverty line, by sex, age, employment status and geographical location (urban/rural). Three parameters were selected to be monitored for this indicator: - The amount of fuel save, Percentage of household noted on money save and Percentage of household noted on time save after using the project technology.</li> <li>- 13.3.1 Number of countries that have integrated mitigation, adaptation, impact reduction and early warning into primary, secondary and tertiary curricula. The total amount of emission reduction is the monitored parameter.</li> </ul>
------------------------	--

	- 15.1.1 Forest area as a proportion of total land area. Area of forest save is the monitored parameter.
Data / Parameter:	$Q_{p, \text{cleanboil}, y}$
Unit	Litres/person/day
Description	Quantity of safe water (treated or from safe supply) boiled in the project scenario p, after installation of the CWP
Measured/calculated/default	Measured/calculated
Source of data	Water Consumption Field Test (WCFT)
Value(s) of monitored applied	0.02
Monitoring equipment	Analog scale is used to weight the volume of filtered water boiled per person per day. The verification of calibration of scale was conducted by checking its accuracy against the standard weight. Only scale that passed this verification are utilized in the test. The details of this scale's verification can be found in "ACS_HSE-Calibration&Inventory_2024_EN".
Measuring/Reading/Recording frequency:	Before first verification of each crediting period and every two years for the sequential monitoring period.
Calculation method (if applicable):	The detail calculation can be found in "HSE_CP2-MP7_2025_US-PS-WCFT_V3.0, Table 35" and "HSE_CP2-MP7_WCFT_Protocol(EN)_Final".
QA/QC procedures:	Data collected during the tests were collected over a four-day period, this information was recorded on the tablet-base data collection systems. Following the encoding process, the analysis was led by experienced consultant and the final results was then validated by the Carbon Project Manager at Nexus. See "HSE_CP2-MP7_2025_US-PS-WCFT_V3.0, Table 35". Data analysis sheet is available on request to the VVB.
Purpose of data:	Calculation of ER.
Additional comment:	Due to the margin of error (97.31%) is greater than 10% (90/10 rule), the upper limit value (0.02 liter) is used instead of mean value (0.01 liter) for conservativeness as stated in TPDDTEC V3.0, footnote 21.

<b>Relevant SDG Indicator</b>	5.4.1 Proportion of time spent on unpaid domestic and care work, by sex, age and location. The number of women and girls benefiting from stop/reducing boiling water and collecting/purchasing cooking fuel is the monitored parameter.
<b>Data / Parameter:</b>	Women%_HH
Unit	Percentage
Description	Average percentage of women and girls per household who use CWP
Measured/Calculated/Default	Measured
Source of data	Monitoring survey "HSE_CP2-MP7_2025_US-PS-WCFT_V3.0, Table 5"
Value(s) of monitored parameter	55.91
Monitoring equipment	Questionnaire
Measuring/Reading/Recording frequency:	Annually
Calculation method (if applicable):	Results of the survey

QA/QC procedures:	Monitoring survey was conducted in line with the registered methodology. The detail of the survey could be found in HSE_CP2-MP7_2025_US-PS-WCFT_V3.0. Also, see "HSE_CP2-MP7_ Monitoring_Flow" for the monitoring survey and its quality control flow chart.
Purpose of data:	To estimate SDG5 contribution
Additional comment:	N/A

<b>Relevant SDG Indicator</b>	5.4.1 Proportion of time spent on unpaid domestic and care work, by sex, age and location. The number of women and girls benefiting from stop/reducing boiling water and collecting/purchasing cooking fuel is the monitored parameter.
<b>Data / Parameter:</b>	Women%
Unit	Percentage
Description	Average percentage of women and girls responsible for water boiling and collecting/purchasing cooking fuel before having CWPs
Measured/Calculated/Default	Measured
Source of data	Monitoring survey "HSE_CP2-MP7_2025_US-PS-WCFT_V3.0, Table 20&24"
Value(s) applied	77.16
Monitoring equipment	Questionnaire
Measuring/Reading/Recording frequency:	Annually
Calculation method (if applicable):	Based on the result from the monitoring survey, Women% = Average [ % women and girls responsible for water boiling (97.8%), % women and girls responsible for collecting/purchasing cooking fuel (56.52%) ] = 77.16%
QA/QC procedures:	Monitoring survey was conducted in line with the registered methodology. The detail of the survey could be found in "HSE_CP2-MP7_2025_US-PS-WCFT_V3.0". Also, see "HSE_CP2-MP7_ Monitoring_Flow" for the monitoring survey and its quality control flow chart.
Purpose of data:	To estimate SDG5 contribution
Additional comment:	N/A

<b>Relevant SDG Indicator</b>	3.9.1 Mortality rate attributed to household and ambient air pollution. The number of people who notice less smoke in kitchen after having water filter is the monitored parameter
<b>Data / Parameter:</b>	$N_{Less\_smoke,y}$
Unit	%
Description	% of households notice that their kitchen is less smoke
Measured/Calculated/Default	Measured
Source of data	Monitoring survey "HSE_CP2-MP7_2025_US-PS-WCFT_V3.0, Table 29"
Value(s) of monitored parameter	56.52
Monitoring equipment	Questionnaire
Measuring/Reading/Recording frequency:	Annually

Calculation method (if applicable):	Result of the survey
QA/QC procedures:	Monitoring survey was conducted in line with the registered methodology. The detail of the survey could be found in "HSE_CP2-MP7_2025_US-PS-WCFT_V3.0". Also, see "HSE_CP2-MP7_Monitoring_Flow" for the monitoring survey and its quality control flow chart.
Purpose of data:	To estimate SDG3 contribution
Additional comment:	N/A

<b>Relevant SDG Indicator</b>	<ul style="list-style-type: none"> <li>- 1.1.1 Proportion of population below the international poverty line, by sex, age, employment status and geographical location (urban/rural). Three parameters were selected to be monitored for this indicator: - The amount of fuel save, Percentage of household noted on money save and Percentage of household noted on time save after using the project technology.</li> <li>- 13.3.1 Number of countries that have integrated mitigation, adaptation, impact reduction and early warning into primary, secondary and tertiary curricula. The total amount of emission reduction is the monitored parameter.</li> <li>- 15.1.1 Forest area as a proportion of total land area. Area of forest save is the monitored parameter.</li> </ul>
<b>Data / Parameter:</b>	% of Traditional Stove Users with wood in the project scenario
Unit	%
Description	Percentage of Traditional Stove Users with wood in the project scenario
Measured/Calculated/Default	Measured/calculated
Source of data	Monitoring survey "HSE_CP2-MP7_2025_US-PS-WCFT_V3.0, Table 23"
Value(s) of monitored parameter	44.10
Monitoring equipment	Questionnaire
Measuring/Reading/Recording frequency:	Annually
Calculation method (if applicable):	For simplicity and conservativeness, percentage of 3-stone stove user with wood and concrete stove users with wood in the project scenario is included in the % of traditional stove users with wood in the project scenario. = % 3-stone stove users with wood in the project scenario (8.8%) + concrete stove users with wood in the project scenario (0%) + % traditional stove users with wood in the project scenario (35.30%) = 44.10%
QA/QC procedures:	Monitoring survey was conducted in line with the registered methodology. The detail of the survey could be found in "HSE_CP2-MP7_2025_US-PS-WCFT_V3.0". Also, see "HSE_CP2-MP7_Monitoring_Flow" for the monitoring survey and its quality control flow chart.
Purpose of data:	Calculation of ER.
Additional comment:	N/A

<b>Relevant SDG Indicator</b>	- 1.1.1 Proportion of population below the international poverty line, by sex, age, employment status and geographical location (urban/rural). Three parameters were
-------------------------------	--

	<p>selected to be monitored for this indicator: - The amount of fuel save, Percentage of household noted on money save and Percentage of household noted on time save after using the project technology.</p> <ul style="list-style-type: none"> <li>- 13.3.1 Number of countries that have integrated mitigation, adaptation, impact reduction and early warning into primary, secondary and tertiary curricula. The total amount of emission reduction is the monitored parameter.</li> <li>- 15.1.1 Forest area as a proportion of total land area. Area of forest save is the monitored parameter.</li> </ul>
<b>Data / Parameter:</b>	% of Improved Stove Users with wood in the project scenario
Unit	%
Description	Percentage of Improved Stove Users with wood in the project scenario
Measured/Calculated/Default	Measured
Source of data	Monitoring survey "HSE_CP2-MP7_2025_US-PS-WCFT_V3.0, Table 23".
Value(s) applied	11.80
Monitoring equipment	Questionnaire
Measuring/Reading/Recording frequency:	Annually
Calculation method (if applicable):	Result of the survey
QA/QC procedures:	Monitoring survey was conducted in line with the registered methodology. The detail of the survey could be found in "HSE_CP2-MP7_2025_US-PS-WCFT_V3.0". Also, see "HSE_CP2-MP7_Monitoring_Flow" for the monitoring survey and its quality control flow chart.
Purpose of data:	Calculation of ER.
Additional comment:	N/A

<b>Relevant SDG Indicator</b>	<ul style="list-style-type: none"> <li>- 1.1.1 Proportion of population below the international poverty line, by sex, age, employment status and geographical location (urban/rural). Three parameters were selected to be monitored for this indicator: - The amount of fuel save, Percentage of household noted on money save and Percentage of household noted on time save after using the project technology.</li> <li>- 13.3.1 Number of countries that have integrated mitigation, adaptation, impact reduction and early warning into primary, secondary and tertiary curricula. The total amount of emission reduction is the monitored parameter.</li> <li>- 15.1.1 Forest area as a proportion of total land area. Area of forest save is the monitored parameter.</li> </ul>
<b>Data / Parameter:</b>	% of Traditional Stove Users with charcoal in the project scenario
Unit	%
Description	Percentage of Traditional Stove Users with charcoal in the project scenario
Measured/Calculated/Default	Measured
Source of data	Monitoring survey "HSE_CP2-MP7_2025_US-PS-WCFT_V3.0, Table 23"
Value(s) of monitored parameter	11.8

Monitoring equipment	Questionnaire
Measuring/Reading/Recording frequency:	Annually
Calculation method (if applicable):	Result of the survey
QA/QC procedures:	Monitoring survey was conducted in line with the registered methodology. The detail of the survey could be found in "HSE_CP2-MP7_2025_US-PS-WCFT_V3.0". Also, see "HSE_CP2-MP7_Monitoring_Flow" for the monitoring survey and its quality control flow chart.
Purpose of data:	Calculation of ER.
Additional comment:	N/A

<b>Relevant SDG Indicator</b>	<ul style="list-style-type: none"> <li>- 1.1.1 Proportion of population below the international poverty line, by sex, age, employment status and geographical location (urban/rural). Three parameters were selected to be monitored for this indicator: - The amount of fuel save, Percentage of household noted on money save and Percentage of household noted on time save after using the project technology.</li> <li>- 13.3.1 Number of countries that have integrated mitigation, adaptation, impact reduction and early warning into primary, secondary and tertiary curricula. The total amount of emission reduction is the monitored parameter.</li> <li>- 15.1.1 Forest area as a proportion of total land area. Area of forest save is the monitored parameter.</li> </ul>
<b>Data / Parameter:</b>	% of Improved Stove Users with charcoal in the project scenario
Unit	%
Measured/Calculated/Default	Measured
Description	Percentage of Improved Stove Users with charcoal in the project scenario
Source of data	Monitoring survey "HSE_CP2-MP7_2025_US-PS-WCFT_V3.0, Table 23"
Value(s) of monitored parameter	2.9
Monitoring equipment	Questionnaire
Measuring/Reading/Recording frequency:	Annually
Calculation method (if applicable):	Result of the survey
QA/QC procedures:	Monitoring survey was conducted in line with the registered methodology. The detail of the survey could be found in "HSE_CP2-MP7_2025_US-PS-WCFT_V3.0". Also, see "HSE_CP2-MP7_Monitoring_Flow" for the monitoring survey and its quality control flow chart.
Purpose of data:	Calculation of ER.
Additional comment:	N/A

<b>Relevant SDG Indicator</b>	<ul style="list-style-type: none"> <li>- 1.1.1 Proportion of population below the international poverty line, by sex, age, employment status and geographical location (urban/rural). Three parameters were selected to be monitored for this indicator: - The amount of fuel save, Percentage of household noted on</li> </ul>
-------------------------------	---

	<p>money save and Percentage of household noted on time save after using the project technology.</p> <ul style="list-style-type: none"> <li>- 13.3.1 Number of countries that have integrated mitigation, adaptation, impact reduction and early warning into primary, secondary and tertiary curricula. The total amount of emission reduction is the monitored parameter.</li> <li>- 15.1.1 Forest area as a proportion of total land area. Area of forest save is the monitored parameter.</li> </ul>
<b>Data / Parameter:</b>	% of LPG stove usage in the project scenario
Unit	%
Description	Percentage of LPG stove usage in the project scenario
Measured/Calculated/Default	Measured
Source of data	Monitoring survey "HSE_CP2-MP7_2025_US-PS-WCFT_V3.0, Table 23"
Value(s) of monitored parameter	8.8
Monitoring equipment	Questionnaire
Measuring/Reading/Recording frequency:	Annually
Calculation method (if applicable):	Result of the survey
QA/QC procedures:	Monitoring survey was conducted in line with the registered methodology. The detail of the survey could be found in "HSE_CP2-MP7_2025_US-PS-WCFT_V3.0". Also, see "HSE_CP2-MP7_Monitoring_Flow" for the monitoring survey and its quality control flow chart.
Purpose of data:	Calculation of ER.
Additional comment:	N/A

<b>Relevant SDG Indicator</b>	<ul style="list-style-type: none"> <li>- 1.1.1 Proportion of population below the international poverty line, by sex, age, employment status and geographical location (urban/rural). Three parameters were selected to be monitored for this indicator: - The amount of fuel save, Percentage of household noted on money save and Percentage of household noted on time save after using the project technology.</li> <li>- 13.3.1 Number of countries that have integrated mitigation, adaptation, impact reduction and early warning into primary, secondary and tertiary curricula. The total amount of emission reduction is the monitored parameter.</li> <li>- 15.1.1 Forest area as a proportion of total land area. Area of forest save is the monitored parameter.</li> </ul>
<b>Data / Parameter:</b>	% of Small LPG stove usage in the project scenario
Unit	%
Description	Percentage of small LPG stove usage in the project scenario
Measured/Calculated/Default	Measured
Source of data	Monitoring survey "HSE_CP2-MP7_2025_US-PS-WCFT_V3.0, Table 28"
Value(s) of monitored parameter	66.67
Monitoring equipment	Questionnaire
Measuring/Reading/Recording frequency:	Annually

Calculation method (if applicable):	Result of the survey
QA/QC procedures:	Monitoring survey was conducted in line with the registered methodology. The detail of the survey could be found in "HSE_CP2-MP7_2025_US-PS-WCFT_V3.0". Also, see "HSE_CP2-MP7_Monitoring_Flow" for the monitoring survey and its quality control flow chart.
Purpose of data:	Calculation of ER.
Additional comment:	N/A

<b>Relevant SDG Indicator</b>	<ul style="list-style-type: none"> <li>- 1.1.1 Proportion of population below the international poverty line, by sex, age, employment status and geographical location (urban/rural). Three parameters were selected to be monitored for this indicator: - The amount of fuel save, Percentage of household noted on money save and Percentage of household noted on time save after using the project technology.</li> <li>- 13.3.1 Number of countries that have integrated mitigation, adaptation, impact reduction and early warning into primary, secondary and tertiary curricula. The total amount of emission reduction is the monitored parameter.</li> <li>- 15.1.1 Forest area as a proportion of total land area. Area of forest save is the monitored parameter.</li> </ul>
<b>Data / Parameter:</b>	% of Large LPG stove usage in the project scenario
Unit	%
Description	Percentage of large LPG stove usage in the project scenario
Measured/Calculated/Default	Measured
Source of data	Monitoring survey "HSE_CP2-MP7_2025_US-PS-WCFT_V3.0, Table 28"
Value(s) of monitored parameter	33.33
Monitoring equipment	Questionnaire
Measuring/Reading/Recording frequency:	Annually
Calculation method (if applicable):	Result of the survey
QA/QC procedures:	Monitoring survey was conducted in line with the registered methodology. The detail of the survey could be found in "HSE_CP2-MP7_2025_US-PS-WCFT_V3.0". Also, see "HSE_CP2-MP7_Monitoring_Flow" for the monitoring survey and its quality control flow chart.
Purpose of data:	Calculation of ER.
Additional comment:	N/A

Relevant SDG Indicator	13.3.1 Number of countries that have integrated mitigation, adaptation, impact reduction and early warning into primary, secondary and tertiary curricula. The total amount of emission reduction is the monitored parameter.
Data / Parameter:	LE <sub>p,y</sub>
Unit	tCO <sub>2e</sub> per unit per year
Description	Leakage emissions for project scenario p during year y
Measured/Calculated/Default	Measured/Calculated

Source of data	Source of data for the following parameter are provided as following: - Leakage emissions: ER spreadsheet, Tab: Leakage, Cell D16
Value(s) of monitored parameter	0.0
Monitoring equipment	Record
Measuring/Reading/Recording frequency:	Every two years
Calculation method (if applicable):	Hydrologic has switched from wood to LPG Kiln starting from January 2023, Thus, there is no leakage generated from using firewood.
QA/QC procedures:	Transparent data analysis.
Purpose of data:	Calculation of ER.
Additional comment:	<p>1. The PP also tracks diesel, gasoline and LPG used to power generators for electricity and LPG Kiln at the factory, however these emissions were determined to be immaterial as they represent 0.17% of the emission reductions achieved in the monitoring period.</p> <p>In this monitoring period, the PP purchased 16,000 liters of Diesel, zero liters of gasoline and 5.62ton of LPG, as shown in "HSE_CP2_MP7_Diesel&amp;LPG_Purchase". Total emission from using this fuel was estimated to be 59.90 tCO<sub>2e</sub> (43.08 tCO<sub>2e</sub> from diesel, 0.0 tCO<sub>2e</sub> from gasoline and 16.82 from LPG).</p> <p>tCO<sub>2</sub> from Diesel = Liters of Diesel (L) * Density of Diesel (kg/L) / 1000 (kg to tonnes) * Net Calorific Value of Diesel (GJ/tonne) * Emission Factor of Diesel (tCO<sub>2</sub>/GJ) =16,000L * 0.84 kg/L / 1,000,000 (kg to Gg) * 43 TJ/Gg * 74.53 tCO<sub>2</sub>/TJ = 43.08 tCO<sub>2</sub></p> <p>tCO<sub>2</sub> from Gasoline = Liters of Gasoline (L) * Density of Gasoline (kg/L) / 1,000,000 (kg to Gg) * Net Calorific Value of Gasoline (TJ/Gg) * Emission Factor of Gasoline (tCO<sub>2</sub>/TJ). =0.0 L * 0.74 kg/L / 1000000 (kg to Gg) * 44.3 TJ/Gg * 69.73 tCO<sub>2</sub>/TJ = 0.00 tCO<sub>2</sub></p> <p>tCO<sub>2</sub> from LPG = LPG Weight (ton) * Net Calorific Value of LPG (GJ/tonne) / 1000 (GJ to TJ) * Emission Factor of LPG (tCO<sub>2</sub>/TJ) =5.62 (tonne)*47.3 (GJ/tonne)/1000 * 63.27 (tCO<sub>2</sub>/TJ) =16.82 tCO<sub>2e</sub></p> <p>Total emission from diesel, gasoline and LPG = 43.08 tCO<sub>2</sub> + 0.00 tCO<sub>2</sub> + 16.82 tCO<sub>2</sub> = 59.90 tCO<sub>2</sub> Percentage of Emission Reductions (%) = Emissions from fuel Diesel and Gasoline / Emission Reductions in the Monitoring Period 59.90 tCO<sub>2</sub> / 35,018 tCO<sub>2e</sub> = 0.17%</p> <p>The PDD specifies that the PP shall monitor Leakage using "monitoring surveys", as specified in the PDD. For this</p>

	methodology, this refers to the project activity replacing a lower emissions method of water treatment. While the project activity is a zero-emissions solution, the PP still asked end-users in the Project Survey if they had been treating water, what treatment method they used. Of those who treated water, 42.56% were boiling water, 12.04% were using other method (let is stand and settle) and 15.74% were using some other type of filtration technique, as shown in "HSE_CP2-MP7_2025_US-PS-WCFT_V3.0, Table 19". The PP has therefore concluded that it has not replaced a lower emitting device, and that it does not need to assess this form of leakage.
--	---

<b>Relevant SDG Indicator</b>	1.1.1 Proportion of population below the international poverty line, by sex, age, employment status and geographical location (urban/rural). Three parameters were selected to be monitored for this indicator: - The amount of fuel save, Percentage of household noted on money save and Percentage of household noted on time save after using the project technology.
<b>Data / Parameter:</b>	Net benefit (a) of SDG1
Unit	tonne
Description	Total amount of biomass fuel saves
Measured/Calculated/Default	Calculated
Source of data	Calculated in ER spreadsheet, Tab: Nexus_Summary, cell AJ13
Value(s) of monitored parameter	49,843
Monitoring equipment	Survey and calculation
Measuring/Reading/Recording frequency:	Annually
Calculation method (if applicable):	Please refer to section E1, E2 and E3 for the detail calculation method
QA/QC procedures:	Transparent data analysis and reporting. The data is analyzed in the monitoring report and raw data is available on request to the VVB.
Purpose of data:	To estimate SDG1 contribution
Additional comment:	

<b>Relevant SDG Indicator</b>	1.1.1 Proportion of population below the international poverty line, by sex, age, employment status and geographical location (urban/rural). Three parameters were selected to be monitored for this indicator: - The amount of fuel save, Percentage of household noted on money save and Percentage of household noted on time save after using the project technology.
<b>Data / Parameter:</b>	Net benefit (b) of SDG1
Unit	tonne
Description	Total amount of LPG saves
Measured/Calculated/Default	Calculated
Source of data	Calculated in ER spreadsheet, Tab: Nexus_Summary, cell AK13
Value(s) of monitored parameter	946

Monitoring equipment	Survey and calculation
Measuring/Reading/Recording frequency:	Annually
Calculation method (if applicable):	Please refer to section E1, E2 and E3 for the detail calculation method
QA/QC procedures:	Transparent data analysis and reporting. The data is analyzed in the monitoring report and raw data is available on request to the VVB.
Purpose of data:	To estimate SDG1 contribution
Additional comment:	

<b>Relevant SDG Indicator</b>	1.1.1 Proportion of population below the international poverty line, by sex, age, employment status and geographical location (urban/rural). Three parameters were selected to be monitored for this indicator: - The amount of fuel save, Percentage of household noted on money save and Percentage of household noted on time save after using the project technology.
<b>Data / Parameter:</b>	Net benefit (c) of SDG1
Unit	%
Description	Percentage of household noted on money save after using the project technology
Measured/Calculated/Default	Measured
Source of data	Monitoring survey "HSE_CP2-MP7_2025_US-PS-WCFT_V3.0, Table 30"
Value(s) of monitored parameter	89.09
Monitoring equipment	Survey and calculation
Measuring/Reading/Recording frequency:	Annually
Calculation method (if applicable):	Result of the survey
QA/QC procedures:	Transparent data analysis and reporting. The data is analyzed in the monitoring report and raw data is available on request to the VVB.
Purpose of data:	To estimate SDG1 contribution
Additional comment:	N/A

Relevant SDG Indicator	1.1.1 Proportion of population below the international poverty line, by sex, age, employment status and geographical location (urban/rural). Three parameters were selected to be monitored for this indicator: - The amount of fuel save, Percentage of household noted on money save and Percentage of household noted on time save after using the project technology.
Data / Parameter:	Net benefit (d) of SDG1
Unit	%
Description	Percentage of household noted on time save after using the project technology
Measured/Calculated/Default	Measured/calculated
Source of data	Monitoring survey "HSE_CP2-MP7_2025_US-PS-WCFT_V3.0, Table 29&31"

Value(s) of monitored parameter	85.32
Monitoring equipment	Survey and calculation
Measuring/Reading/Recording frequency:	Annually
Calculation method (if applicable):	= (%HH saved time from boiling water (86.96%) +%HH saved time from avoiding collecting or purchasing fuel (83.63%)/2 = 85.32%
QA/QC procedures:	Transparent data analysis and reporting. The data is analyzed in the monitoring report and raw data is available on request to the VVB.
Purpose of data:	To estimate SDG1 contribution
Additional comment:	N/A

<b>Relevant SDG Indicator</b>	3.9.1 Mortality rate attributed to household and ambient air pollution. The number of people who notice less smoke in kitchen after having water filter is the monitored parameter
<b>Data / Parameter:</b>	Net benefits of SDG3
Unit	People
Description	Number of people using CWP and note that their kitchen is less smoke
Measured/Calculated/Default	Measured/calculated
Source of data	Calculated, ER spreadsheet, Tab: Nexus_Summary, cell AN13
Value(s) of monitored parameter	317,810
Monitoring equipment	Survey and calculation
Measuring/Reading/Recording frequency:	Annually
Calculation method (if applicable):	Please refer to section E1, E2, E3 for the detail calculation method
QA/QC procedures:	Transparent data analysis and reporting. The data is analyzed in the monitoring report and raw data is available on request to the VVB.
Purpose of data:	To estimate SDG3 contribution
Additional comment:	

<b>Relevant SDG Indicator</b>	5.4.1 Proportion of time spent on unpaid domestic and care work, by sex, age and location. The number of women and girls benefiting from stop/reducing boiling water and collecting/purchasing cooking fuel is the monitored parameter.
<b>Data / Parameter:</b>	Net benefits of SDG5
Unit	People
Description	The number of women and girls benefiting from stop/reduce boiling water and collecting/purchasing cooking fuel.
Measured/Calculated/Default	Measured/Calculated
Source of data	Calculated, ER spreadsheet, Tab: Nexus_Summary, cell AO13
Value(s) of monitored parameter	179,579
Monitoring equipment	Survey and calculation

Measuring/Reading/Recording frequency:	Annually
Calculation method (if applicable):	Please refer to section E1, E2 and E3 for the detail calculation method
QA/QC procedures:	Transparent data analysis and reporting. The data is analyzed in the monitoring report and raw data is available on request to the VVB.
Purpose of data:	To estimate SDG5 contribution
Additional comment:	

<b>Relevant SDG Indicator</b>	6.1.1 Proportion of population using safely managed drinking water services. The number of people with access to safe drinking water is the monitored parameter.
<b>Data / Parameter:</b>	Net benefits of SDG6
Unit	People
Description	Number of people with access to safe drinking water
Measured/Calculated/Default	Calculated
Source of data	Calculated, ER spreadsheet, Tab: Nexus_Summary, cell AP13
Value(s) of monitored parameter	562,297
Monitoring equipment	Survey and calculation
Measuring/Reading/Recording frequency:	Annually
Calculation method (if applicable):	Please refer to section E1, E2 and E3 for the detail calculation method
QA/QC procedures:	Transparent data analysis and reporting. The data is analyzed in the monitoring report and raw data is available on request to the VVB.
Purpose of data:	To estimate SDG6 contribution
Additional comment:	

<b>Relevant SDG Indicator</b>	7.1.2 Proportion of population with primary reliance on clean fuels and technology. Amount of energy saves from avoiding boiling water under the project activity is the monitored parameter.
<b>Data / Parameter:</b>	Net benefits of SDG7
Unit	TJ
Description	Amount of energy saved from avoiding boiling water
Measured/Calculated/Default	Calculated
Source of data	Calculated, ER spreadsheet, Tab: Nexus_Summary, cell AQ13
Value(s) of monitored parameter	792
Monitoring equipment	Survey and calculation
Measuring/Reading/Recording frequency:	Annually
Calculation method (if applicable):	Please refer to section E1, E2 and E3 for the detail calculation method
QA/QC procedures:	Transparent data analysis and reporting. The data is analyzed in the monitoring report and raw data is available on request to the VVB.
Purpose of data:	To estimate SDG7 contribution
Additional comment:	

<b>Relevant SDG Indicator</b>	8.5.1 Average hourly earnings of female and male employees, by occupation, age and persons with disabilities. The number of new job created by the project with safe and healthy work environment is the monitored parameter.
<b>Data / Parameter:</b>	Net benefit of SDG8
Unit	staff
Description	Number of new job created by the project with safe and healthy work environment
Measured/Calculated/Default	Measured
Source of data	Staff report "HSE_CP2-MP7_Em&Inc2024"
Value(s) of monitored parameter	114
Monitoring equipment	Record
Measuring/Reading/Recording frequency:	At least every two years
Calculation method (if applicable):	PP is monitoring and recording number of the employed staff
QA/QC procedures:	Transparent data analysis and reporting. The data is analyzed in the monitoring report and raw data is available on request to the VVB.
Purpose of data:	To define SDG8's contribution
Additional comment:	The average monthly income of hydrologic staff is greater or equal to the Cambodian minimum wage of 204 USD as detail in "HSE_CP2-MP7_Em&Inc2024".

<b>Relevant SDG Indicator</b>	- 13.3.1 Number of countries that have integrated mitigation, adaptation, impact reduction and early warning into primary, secondary and tertiary curricula. The total amount of emission reduction is the monitored parameter.
<b>Data / Parameter:</b>	Net benefits of SDG13
Unit	tCO <sub>2</sub> e
Description	Amount of ER
Measured/Calculated/Default	Calculated
Source of data	Calculated, ER spreadsheet, Tab: Nexus_Summary, cell F13
Value(s) of monitored parameter	35,018
Monitoring equipment	Survey and calculation
Measuring/Reading/Recording frequency:	Annually
Calculation method (if applicable):	Please refer to section E1, E2 and E3 for the detail calculation method
QA/QC procedures:	Transparent data analysis and reporting. The data is analyzed in the monitoring report and raw data is available on request to the VVB.
Purpose of data:	To estimate SDG13 contribution
Additional comment:	

<b>Relevant SDG Indicator</b>	15.1.1 Forest area as a proportion of total land area. The area of forest save is monitored indicator.
<b>Data / Parameter:</b>	Net benefits of SDG15
Unit	Hectare

Description	Area of forest save
Measured/Calculated/Default	Calculated
Source of data	Calculated, ER spreadsheet, Tab: Nexus_Summary, cell AT13
Value(s) of monitored parameter	307
Monitoring equipment	Survey and calculation
Measuring/Reading/Recording frequency:	Annually
Calculation method (if applicable):	Please refer to section E1, E2 and E3 for the detail calculation method
QA/QC procedures:	Transparent data analysis and reporting. The data is analysed in the monitoring report and raw data is available on request to the VVB.
Purpose of data:	To estimate SDG15 contribution
Additional comment:	-

## TEMPLATE

### D.3. Comparison of monitored parameters with last monitoring period

No	Description	Parameter	Unit	Value obtained (CP2-MP7)	Value obtained (CP2-MP6)	Remarks on any significant different
1	Total distributed water purifier	$T_{p,y}$	CWP	31,945.00	26,252.00	The sale in this MP is higher than last MP which is good for Hydrologic.
2	Weighted average usage rate	$U_{p,y}$	Percentage	80.76%	81.65%	The usage rate in this MP is slightly lower than that of the previous MP.
3	Water quality passing rate	$WQ_{\text{Passed},y}$	Percentage	93.33%	93.33%	The water quality passing rate in this MP is similar to that of the previous MP.
4	Number of people attending hygiene meeting	Hygiene Campaigns	People	104,774.00	74,079.00	Number of people attending hygiene campaign is more than the last MP which is proportional to the increase of sale.
5	Number of person.days consuming water supplied by project scenario p through year y	$N_{p,y}$	People	1,597.95	1,507.45	The annual number of person days in this MP is slightly higher than the previous year which is due to the increase of number of person per household in this MP.
6	Quantity of purified water consumed in the project scenario p per person per day	$Q_{p,y}$	Litres/person /day	1.69	1.74	The value of $Q_{p,y}$ is slightly lower than hat of last MP.
7	The raw or unsafe water that is still boiled after installation of the CWP	$Q_{p,\text{rawboil},y}$	Litres/person /day	0.31	0.60	$Q_{p,\text{rawboil},y}$ is slightly lower than that of the previous MP.
8	Quantity of safe water (treated or from safe supply) boiled in the project scenario p, after installation of the CWP	$Q_{p,\text{cleanboil},y}$	Litres/person /day	0.02	0.04	$Q_{p,\text{cleanboil},y}$ is slightly lower than that of the previous MP.

No	Description	Parameter	Unit	Value obtained (CP2-MP7)	Value obtained (CP2-MP6)	Remarks on any significant different
9	Average percentage of women and girls per household who use CWP	Women%_HH	Percentage	55.91%	52.78%	Based on the monitoring survey, Women%_HH in this MP is slightly higher than that of previous MP.
10	Average percentage of women and girls responsible for water boiling and collecting/purchasing cooking fuel before having CWPs	Women%	Percentage	77.16%	73.16%	Women% is slightly higher than that of previous MP.
11	% of households notice that their kitchen is less smoke	N <sub>Less_smoke,y</sub>	Percentage	56.52%	100.00%	Based on the monitoring survey, N <sub>Less_smoke,y</sub> in this MP is about half of the previous MP. About 44% of users couldn't notice on the better situation of smoke in their kitchen as they still continue cooking their food by using fuel wood.
12	Percentage of Traditional Stove Users with wood in the project scenario		Percentage	44.10%	61.10%	Based on the monitoring survey, percentage of traditional stove user with wood in the project scenario in this MP is lower than that of previous MP.
13	Percentage of Improved Stove Users with wood in the project scenario		Percentage	11.80%	2.80%	Based on the monitoring survey, percentage of improved stove user with wood in the project scenario in this MP is higher than that of previous MP.
14	Percentage of Traditional Stove Users with charcoal in the project scenario		Percentage	11.80%	5.60%	Based on the monitoring survey, percentage of traditional stove user with charcoal in the project scenario in this MP higher than that of previous MP.
15	Percentage of Improved Stove Users with charcoal in the project scenario		Percentage	2.90%	0.00%	Based on the monitoring survey, percentage of improved stove user with charcoal in the project scenario in this MP is higher than the last MP.
16	Percentage of LPG stove usage in the project scenario		Percentage	8.80%	11.10%	Based on the monitoring survey, percentage of LPG stove usage in the project scenario in this MP is lower than that of previous MP.
17	Percentage of small LPG stove usage in the project scenario		Percentage	66.67%	25.00%	Based on the monitoring survey, percentage of small LPG stove usage in the project scenario in this MP is higher than that of previous MP. This may be due to expansion of small LPG stove market in Cambodia rural areas.

No	Description	Parameter	Unit	Value obtained (CP2-MP7)	Value obtained (CP2-MP6)	Remarks on any significant different
18	Percentage of large LPG stove usage in the project scenario		Percentage	33.33%	75.00%	Based on the monitoring survey, percentage of large LPG stove usage in the project scenario in this MP is less than that of previous MP. This may be due to expansion of small LPG stove market in Cambodia rural areas.
19	Leakage emissions for project scenario p during year y	LE <sub>p,y</sub>	tCO <sub>2</sub> e/Unit/year	-	-	LE <sub>p,y</sub> in this MP is zero because PD has introduced LPG kiln which emit minimal GHG. This insignificant emission is negligible in accordance with the registered methodology TPDDTEC 3.0.
20	Total amount of biomass fuel saves	Net benefit (a) of SDG1	tonne	49,843.00	57,363.00	Net benefit (a) of SDG 1 in this monitoring period is lower than that of previous MP due to different and lower value of parameters applied as described above, especially the number of month for this MP is only 11 months compared to the previous one 12 months.
21	Total amount of LPG saves	Net benefit (b) of SDG1	tonne	946.00	1,128.00	Net benefit (b) of SDG 1 in this monitoring period is lower than that of previous MP. This is due to different and lower value of parameters applied as described above, especially the number of month for this MP is only 11 months compared to the previous one 12 months.
22	Percentage of household noted on money save after using the project technology	Net benefit (c) of SDG1	Percentage	89.09%	62.70%	Net benefit (c) of SDG 1 in this monitoring period is higher than that of previous MP.
23	Percentage of household noted on time save after using the project technology	Net benefit (d) of SDG1	Percentage	85.32%	95.69%	Net benefit (d) of SDG 1 in this monitoring period is slightly lower than that of previous MP.
24	Number of people using CWP and note that their kitchen is less smoke	Net benefits of SDG3	People	317,810.14	387,831.44	Net benefit of SDG 3 in this monitoring period is lower than that of previous MP.

No	Description	Parameter	Unit	Value obtained (CP2-MP7)	Value obtained (CP2-MP6)	Remarks on any significant different
25	The number of women and girls benefiting from stop/reduce boiling water and collecting/purchasing cooking fuel	Net benefits of SDG5	People	179,578.80	173,735.15	Net benefit of SDG 5 in this monitoring period is lower than that of previous MP.
26	Number of people with access to safe drinking water	Net benefits of SDG6	People	562,296.78	510,976.87	Net benefit of SDG 6 in this monitoring period is higher than that of previous MP.
27	Amount of energy saved from avoiding boiling water	Net benefits of SDG7	TJ	792.00	914.00	Net benefits of SDG7 in this monitoring period is lower than that of previous MP due to different and lower value of parameters applied as described above, especially the number of month for this MP is only 11 months compared to the previous one 12 months.
28	Number of new job created by the project with safe and healthy work environment	Net benefit of SDG8	Staff	114.00	100.00	Net benefit of SDG 8 in this monitoring period is slightly higher than that of previous MP.
29	Amount of ER	Net benefits of SDG13	tCO <sub>2</sub> e	35,018.00	101,103.00	Total ER in this monitoring period is lower than that of previous MP due to different and lower value of parameters applied as described above, especially the reduction of fNRB.
30	Area of forest save	Net benefits of SDG15	Hectare	307.00	329.00	Net benefits of SDG15 in this monitoring period is lower than that of previous MP due to different and lower value of parameters applied as described above, especially the number of month for this MP is only 11 months compared to the previous one 12 months.

## TEMPLATE

### D.4. Implementation of sampling plan

#### **Objectives and reliability**

The sampling objective is to meet the Gold Standard (GS) project survey requirements of the target population characteristics for the Hydrologic Ceramic Water Purifier (CWP) project in Cambodia. This will include the existing practice of treating water for consumption by boiling using high emission fuels including non-renewable biomass and fossil fuels in compliance with the GS methodology “Technologies and Practices to Displace Decentralized Thermal Energy Consumption version 3.0 – July 2015”.

This sampling plan includes determining the main characteristics as defined within the GS methodology. The methodology states for “Project Studies for a Water Treatment Scenario” that the project proponent must conduct project studies for each clean water project scenario prior to verifying emission reductions associated with the given project scenario. This approach uses ex-post project studies from which fuel consumption in the baseline scenario is back calculated.

The project proponent must conduct the following project studies for each project scenario:

- Project non-renewable biomass (NRB) assessment, if biomass is one of the fuels consumed;
- Project survey (PS) and usage survey (US) of end user characteristics
- Baseline water boiling test (BWBT)
- Water consumption field test (WCFT) of safe water provision by project technologies and of water boiled in project scenario
- Water Quality Test Survey (WQTS)

For this monitoring period (CP2-MP7), PS, US and WCFT were conducted from 2 to 12 Dec 2024; WQTS was conducted in February 2024 and project NRB assessment was reviewed. BWBT is still valid since there is no change for water boiling technology based on the methodology TPDDTEC Version 3.0.

#### **(a) Description of implemented sampling design**

The PS and US were conducted in compliance with the methodology provided by the Gold Standard (TPDDTEC version 3.0) and designed to be representative of all households in each target group. Households (HH) that purchased either an Original Tusai, Super Tusai, Super Tusai Plus, Tusai Thom and Tusai Thom autofill ceramic water filter within the five years ending 30 June 2024 were eligible for the usage survey, project survey and WCFT. The sample size for each survey component was based on the minimum sample in the Gold Standard methodology, with additional households to compensate for any potential non-response or removal of households at the data cleaning phase.

The WQTS was conducted based on its developed protocol which follow the rule update dated on 30/06/2022 (Application of TPDDTEC Methodology to safe water supply projects), section 2.2.2, PP opts for "water quality test" requirements outlined for parameter SDWS 18 in [Methodology for emission reductions from safe drinking water supply v.1.0](#) - annual water quality test.

### **Target population and sample frame**

The project boundary is defined as the nation of Cambodia.

Households (HH) is used as the unit for baseline calculations on the basis that one CWP will cater for each HH. The target population includes all HHs in the nation of Cambodia, which are end-users of the project technology and who have purchased the CWP from 01/07/2019 through 30/06/2024 which are considered to be eligible for this monitoring period.

The sample of HHs was chosen from Hydrologic's project database representing all CWP customers for whom contact information is available.

This study employs a cluster-based, sample selection methodology to ensure the final sample selected for this study is representative while optimizing fieldwork efficiency. The sample is clustered at the provincial, village, and household level.

### **(b) Demonstration that the samples were randomly selected and are representative of the population**

#### **Sample size**

Given the various project study activities have been consolidated into a single Project Study Group (PSG) and to ensure that the accuracy requirements for each project study activity have been met, the sample size has been determined separately for each project study activity.

The various sample size calculations for each survey activity are discussed below.

#### **Project Survey, Usage survey and water consumption field Test**

The GS methodology for targeted group size with the project greater than 1000<sup>40</sup> states that the minimum sample size requirement that needs to be met as part of the project study is 100 HHs and for usage survey, the sample size must include at least 30 samples for project technologies of each age being credited.

---

<sup>40</sup> Gold Standard (GS) Voluntary Emissions Reduction (VER) methodology, "Technologies and Practices to Displace Decentralized Thermal Energy Consumption version 3.0- July 2015", Page 10.

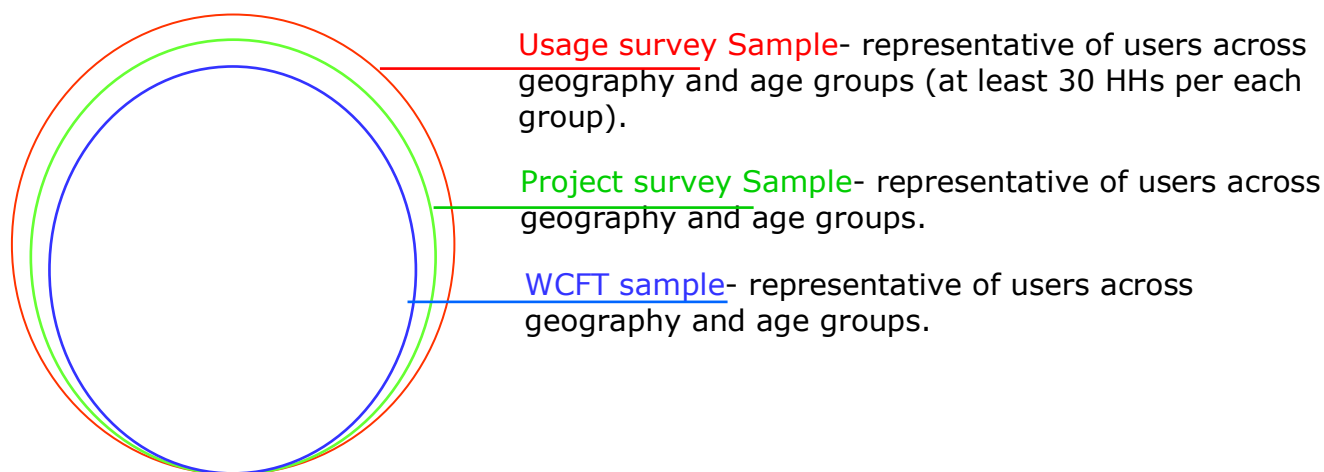


Figure 5 - Overview of Survey sample

The monitoring survey (project and usage survey) was conducted from 2 to 12 Dec 2024. A total of 186 households who have ever owned CWP participated in the usage survey across the 4 representative provinces of Kampong Speu, Kampong Thom, Takeo and Kampot. Out of these 186 households, 154 households are currently still using CWP and they are eligible for participating in the project survey.

It should be noted that the 4 representative provinces were selected based on the total number of Tunsai ceramic water filters sold in the target timeframe (July 2018 – June 2024 and geographic diversity. The World Bank and other institutions divide Cambodia into four geographic regions, with the capital city of Phnom Penh designated as its own region. Within each of these regions, the province with the most Tunsai filters sold was selected for the survey, to ensure that it would be nationally representative and cover as many Tunsai filter users as possible as described in the Provincial sampling section of the monitoring survey report<sup>41</sup>.

**Table 11 - Usage and project survey and water consumption field test sample size**

Survey	Target groups	Sample	Notes
<b>Usage survey</b>	Ever used Tunsai	192	
<b>Age 1</b>		43	Filter purchase date: 1 Jul 2023-30 June 2024
<b>Age 2</b>		38	Filter purchase date: 1 Jul 2022-30 June 2023
<b>Age 3</b>		42	Filter purchase date: 1 Jul 2021-30 June 2022
<b>Age 4</b>		33	Filter purchase date: 1 Jul 2020-30 June 2021
<b>Age 5</b>		36	Filter purchase date: 1 Jul 2019-30 June 2020
<b>Project survey</b>	Current Tunsai users	158	
<b>Age 1</b>		41	
<b>Age 2</b>		35	
<b>Age 3</b>		36	
<b>Age 4</b>		25	
<b>Age 5</b>		21	

<sup>41</sup> HSE\_CP2-MP7\_2025\_US-PS-WCFT\_V3.0, Table 3

For the detail on sampling design, data collection, data analysis and the result of the survey can be found in the project study report<sup>42</sup>.

For water quality test survey, based on the project database, in order to maximize the representation of the final sample, and the ability to easily locate end users, the provinces with the highest sales figures have been prioritized for the provincial sample selection. Based on the requirements of the water quality test which required to be conducted at accredited laboratory, the provinces chosen for this water quality survey must be near the capital city of Phnom Penh to enable the data collector to collect the water samples and to bring them to the accredited testing center (Institut Pasteur du Cambodge<sup>43</sup>) within the same day.

By taking into consideration both the sales rate of the water filters and distance to Phnom Penh, the provinces suggested to be included in the survey are: *Kampong Speu, Kandal, Takeo, Kampot, Kampong Chhnang and Kampong Cham*. However, four provinces out of the six are recommended for this water quality testing survey including Kampong Speu, Takeo, Kampong Chhnang and Kampot. This is done for cost effectiveness without losing its rigor.

### **(c) Collected data**

The survey instruments (questionnaire) were developed in accordance with the registered methodology by both Absolute Consulting Services Co., LTD (ACS), (3<sup>rd</sup> party consultant for conducting the project study) and Nexus for Development (carbon expert consultant). The instruments are developed in both English and Khmer version. To ensure the instruments work effectively, before formatting the instrument into tablet-based data collection system, a pre-testing was conducted.

Then, Computer Assisted Personal Interview (CAPI) was used to record the data for the quantitative survey. The CAPI systems were designed using the [Kobo Toolbox](#) (online and offline field data collection platform) and included section names, question labels, instructions and answers in both English and Khmer. The Khmer interface was used for data collection. The CAPI systems were tested multiple times to check the quality of the translation, the smooth flow of questions, and to make sure that all logic patterns and validation rules were working properly.

All interview cases had a unique survey ID to facilitate tracking and included Interviewer and Supervisor IDs, interview date/time, receipt of informed consent, detailed instructions, non-suggestive probing, logic patterns, validation rules, consistent variable names and coded and open-ended answer options when relevant and applicable. Draft and final versions of the instruments were formatted into tablet-based data collection systems and were ready for use during field staff training, the pilot test, and for actual data collection. The details can be found in the methodology section of the project study report.

For water quality test survey, 45 water samples were collected at the exit of the filter together with basic information of each selected sample.

### **(d) Analysis of the collected data**

---

<sup>42</sup> HSE\_CP2-MP7\_2025\_US-PS-WCFT\_V3.0, from page 8 to page 11.

<sup>43</sup> Institut Pasteur closes at 5:00pm, which should be considered in terms of logistical planning for the water collection.

After the data was provided from field teams, it was cleaned by the project manager and data QC officer. Cleaning checked for any missing values, inappropriate logical skips, or likely erroneous values (outliers). Where any issues were identified, they were addressed by going back to the interviewer's or supervisor's notes for that village/household. For clarification on specific values, respondents were called to confirm correct values. The clean data was then analysed using SPSS statistical analysis software and Microsoft Excel. For usage survey's respondents, results were disaggregated by the age of the filter.

For water quality survey test, the water samples were brought from the field to an accredited testing center (Institut Pasteur du Cambodge<sup>44</sup>) within the same day.

**(f) Demonstration that the required confidence/precision level has been met**

As mentioned above the sample size and sample selection of all the survey components (usage and project survey and WCFT) followed the registered methodology and its results met its respected confidence/precision level or within its threshold.

The number of samples of Usage survey was at least 30 per age group and that of project surveys was at least 100 samples as shown in Table 11.

For WCFT, as stated in section C and D.2, the sample size was within the recommended number and the results of the test met the required confidence/precision level of the 90/10 rule.

Furthermore, for water quality test, the sample size and sample selection was in line with the registered methodology and rule update as detail in its sample protocol which follow the 90/10 rule. The results of the survey met the 10% threshold as explained in section D2. of WQ<sub>Passed,y</sub>.

---

<sup>44</sup> The Institut Pasteur du Cambodge (IPC) is a Cambodian non-profit research institution. It operated under the senior patronage of the Cambodian Ministry of Health (MoH): <https://www.pasteur-kh.org/about-us/>

## SECTION E. CALCULATION OF SDG IMPACTS

### E.1. Calculation of baseline value or estimation of baseline situation of each SDG Impact

#### Goal 1 Contribution

The project technology helps users to save time spending on fuel collection/purchase and boiling water, and save household expenditure on fuel purchase and expenditure on medicine by reducing the rate of having waterborne disease. The indicator for this SDG1 would be **the amount fuel saves; the percentage of household noted on money save after using the project technology and the percentage of time save after using the project technology** which is relevant to the UN’s SDG indicator “1.1.1 Proportion of population below the international poverty line, by sex, age, employment status and geographical location (urban/rural).”

#### Estimating baseline outcome:

In the baseline situation, no percentage of household noted on money save and no percentage of household noted on time save after using the project technology. Therefore, the two baseline outcome benefits are zero. The amount of fuel use to boil water in the baseline scenario can be estimated as following equation:

Baseline outcome (a) of SDG1

$$\text{The amount of Biomass use} = T_{p,y} * U_{p,y} * WQ_{Passed,y} * B_{Use,Biomass,b,y}$$

**Equation 1**

Baseline outcome (b) of SDG1

$$\text{The amount of LPG use} = T_{p,y} * U_{p,y} * WQ_{Passed,y} * B_{Use,LPG,b,y}$$

**Equation 2**

Baseline outcome (c) of SDG1 = % of household noted on money save in the baseline scenario

0%

Baseline outcome (d) of SDG1 = % of household noted on time save in the baseline scenario

0%

Where

Parameters	Description	Source/value
Baseline outcome (a) of SDG1	Total amount of biomass fuel use in baseline (tonne)	To be calculated <b>Equation 1</b>
Baseline outcome (b) of SDG1	Total amount of LPG fuel use in baseline (tonne)	To be calculated <b>Equation 2</b>
$T_{p,y}$	Cumulative number of sold project technologies (CWP)	See section D.2
$U_{p,y}$	Weighted average usage rate for technologies in project scenario p during year y, based on cumulative installation rate and drop off rate	See section D.2
$WQ_{Passed,y}$	Water Quality passing rate of water quality standard (WHO standard) per year	See section D.2
$B_{Use\_biomass,b,y}$	Amount of fuel use per household having CWP per year (including both wood and wood equivalent converting from charcoal) in baseline	To be calculated <b>Equation 3</b>
$B_{Use\_LPG,b,y}$	Amount of LPG use per household having CWP per year in baseline	To be calculated <b>Equation 6</b>

- Calculating  $B_{Use\_biomass,b,y}$ :

$$B_{Use\_biomass,b,y} = B_{Use\_wood,b,y} + B_{Use\_charcoal,b,y} * F_{wood-charcoal}$$

**Equation 3**

Where:

Parameters	Description	Source/value
$B_{use\_wood,b,y}$	Amount of wood use per CWP per year	To be calculated <b>Equation 4</b>
$B_{use\_charcoal,b,y}$	Amount of charcoal use per CWP per year	To be calculated <b>Equation 5</b>
$F_{wood-charcoal}$	Conversion factor from wood to charcoal	See section D.1

$$B_{use\_wood,b,y} = B_{b,y,wood} \quad \text{Equation 4}$$

Parameters	Description	Source/value
$B_{b,y,wood}$	Quantity of fuel (wood) consumed in baseline scenario b during year y in tonnes	Equation 9

$$B_{use,b,y, charcoal} = B_{b,y,charcoal} \quad \text{Equation 5}$$

Parameters	Description	Source/value
$B_{b,y,charcoal}$	Quantity of fuel (charcoal) consumed in baseline scenario b during year y in tonnes	Equation 11

$$B_{use\_LPG,b,y} = B_{b,y,LPG} \quad \text{Equation 6}$$

Parameters	Description	Source/value
$B_{b,y,LPG}$	Quantity of fuel (LPG) consumed in baseline scenario b during year y in tonnes	Equation 13

Based on the above equation and monitoring survey data, the baseline outcomes was estimated as following:

**Table 12 - Baseline outcomes of SDG1**

Indicator	Unit	Baseline situation <sup>45</sup>
<b>SDG1 (a) Biomass use</b>	tonne	61,862
<b>SDG1 (b) LPG use</b>	tonne	1,039
<b>SDG1 (c) % of HH noted on money save</b>	%	0
<b>SDG1 (d) of % of HH noted on time save</b>	%	0

### Goal 3 contribution

The project technology help reducing smoke and dust coming from boiling water with solid biomass. The SDG’s indicator of this target is **the number of people who notice less smoke in kitchen after having water filter** which is relevant to the UN’s SDG indicator “3.9.1 Mortality rate attributed to household and ambient air pollution”.

*Estimating baseline outcome:*

In baseline situation, no change in smoke level from boiling water. Therefore, baseline outcome benefit is zero.

<sup>45</sup> Please refer to ER spreadsheet, tab “nexus summary, cell L13:O13”

### Goal 5 contribution

The project is compliance with the gender sensitive requirements as demonstrated in GS4GG transition Annex.

The project technology help reducing the work load on women and girls who are responsible for boiling water and collecting/purchasing cooking fuel which is contributing to the target 5.4 "Recognize and value unpaid care and domestic work through the provision of public services, infrastructure and social protection policies and the promotion of shared responsibility within the household and the family as nationally appropriate" of Goal 5. The SDG's indicator of this target is **the number of women and girls benefiting from stop/reduce boiling water and collecting/purchasing cooking fuel** which is relevant to the UN's SDG indicator "5.4.1 Proportion of time spent on unpaid domestic and care work, by sex, age and location".

*Estimating Baseline outcome:*

In baseline situation, no distribution of project technology. Therefore, baseline outcome benefit is zero.

### Goal 6 contribution

The project technology provides a clean water supply to the users which is contributing to the target 6.1. The SDG's indicator of this target is **the number of people served with satisfactory level of safe/potable water** which is relevant to the UN's SDG indicator "6.1.1 Proportion of population using safely managed drinking water services"

*Estimating baseline outcome:*

In baseline situation, no distribution of project technology. Therefore, baseline outcome benefit is zero.

### Goal 7 contribution

The project technology has successfully promoted access to affordable and clean energy services according to the target 7.1 "by 2030 ensure universal access to affordable, reliable, and modern energy services" of Goal 7. The SDG's indicator of this target is **the amount of energy save from avoiding boiling water for drinking** which is relevant to the UN's SDG indicator "7.1.2 Proportion of population with primary reliance on clean fuels and technology".

*Estimating baseline outcome:*

In baseline situation, no distribution of project technology (CWP). Therefore, baseline outcome benefit is zero.

### Goal 8 contribution

Through the project activities, it will create jobs which contribute to the target 8.5 "by 2030 achieve full and productive employment and decent work for all women and men". **The number of new job created by the project with safe and healthy work environment is used as indicator of this SDG8** which is relevant to the UN's SDG indicator "8.5.1 Average hourly earnings of female and male employees, by occupation, age and persons with disabilities".

The job created are logistic manager, production manager, factory worker, admin and finance officer, sale officer and field staffs.

*Estimating baseline outcome:*

In baseline situation, no new job created with safe and healthy work environment. Therefore, baseline outcome benefit is zero.

**Goal 13 contribution**

According to the selected methodology TPDDTEC Version V3.0, the project will help to save fuel which therefore reduce the GHG emission. Amount of ER is calculated according to the selected methodology which is relevant to the UN's SDG indicator SDG13.2.1. The following section will describe a step by step in estimating ER.

Baseline Emissions Calculation  $BE_{b,y}$

$$BE_{b,y} = B_{b,y,wood} * ((f_{NRB,b,y} * EF_{b,wood,CO2}) + EF_{b,wood,nonCO2}) * NCV_{b,wood} + B_{b,y,charcoal} * \text{Wood to charcoal factor} * ((f_{NRB,b,y} * EF_{b,wood,CO2}) + EF_{b,wood,nonCO2}) * NCV_{b,wood} + B_{b,LPG,y} * ((f_{ff,b,y} * EF_{b,LPG,CO2}) + EF_{b,LPG,nonCO2}) * NCV_{b,LPG}$$

Equation 7

Where:

Parameters	Description	Source/value
$BE_{b,y}$	Emissions for baseline scenario b during the year y in tCO <sub>2e</sub>	Equation 7
$B_{b,y,wood}$	Quantity of fuel (wood) consumed in baseline scenario b during year y, in tonnes	To be calculated; Equation 9
$B_{b,y,charcoal}$	Quantity of fuel (charcoal) consumed in baseline scenario b during year y, in tonnes	To be calculated; Equation 11
$B_{b,y,LPG}$	Quantity of fuel (LPG) consumed in baseline scenario b during year y, in tonnes	To be calculated; Equation 13
$f_{NRB,y}$	Fraction of biomass used during year y for the considered scenario that can be established as non-renewable biomass	See section D.1
$f_{ff,b,y}$	Fraction of non-renewable fuel for fossil fuels (LPG)	See section D.1
$NCV_{b,wood}$	Net calorific value of wood that is substituted or reduced	See section D.1
$NCV_{b,LPG}$	Net calorific value of LPG that is substituted or reduced	See section D.1
Wood to charcoal conversion factor	Wood to charcoal conversion factor	See section D.1
$EF_{b,wood,CO2}$	CO <sub>2</sub> emissions factor of the fuel (wood) that it substituted or reduced	See section D.1
$EF_{b,LPG,CO2}$	CO <sub>2</sub> emissions factor of the fuel (LPG) that it substituted or reduced	See section D.1
$EF_{b,wood,nonCO2}$	Non-CO <sub>2</sub> emissions factor of the fuel (wood) that is substituted or reduced	To be calculated; Equation 8
$EF_{b,LPG,nonCO2}$	Non-CO <sub>2</sub> emissions factor of the fuel (LPG) that is substituted or reduced	See section D.1

- Calculate  $EF_{b,wood,nonCO2} / EF_{p,wood,nonCO2}$

$$EF_{b,wood,nonCO2} / EF_{p,wood,nonCO2} = [\text{Wood Emission CH}_4 \text{ Conversion Factor} * \text{Direct Global Warming Potential Equivalency (CH}_4 \text{ to CO}_2)] + [\text{Wood Emission N}_2\text{O Conversion Factor} * \text{Direct Global Warming Potential Equivalency (N}_2\text{O to CO}_2)]$$

Equation 8

Where

Parameters	Description	Source/value
$EF_{b,wood,nonCO2} / EF_{p,wood,nonCO2}$	Non-CO <sub>2</sub> emissions factor of wood that is substituted or reduced	Equation 8
	Wood Emission CH <sub>4</sub> Conversion Factor	See section D.1
	Direct Global Warming Potential Equivalency (CH <sub>4</sub> to CO <sub>2</sub> )	See section D.1

Wood Emission N2O Conversion Factor	See section D.1
Direct Global Warming Potential Equivalency (N <sub>2</sub> O to CO <sub>2</sub> )	See section D.1

- Calculate **B<sub>b,y,wood</sub>**

$$B_{b,y,wood} = \frac{(1-X_{boil}) * (1 - C_j) * N_{p,y} * (W_{b,y, WEIGHTED,wood})}{(Q_{p,y} + Q_{p,rawboil,y})} \quad \text{Equation 9}$$

Where

Parameters	Description	Source/value
B <sub>b,y,wood</sub>	Quantity of wood consumed in baseline scenario p during the year y (tonnes)	Equation 9
X <sub>boil</sub>	Percentage of premises that would have used other non-GHG emitting technologies like chlorine treatment techniques, if available, in the absence of project activities.	See section D.1
N <sub>p,y</sub>	Number of person.days consuming water supplied by project scenario p through year y	See section D.2
C <sub>j</sub>	Portion(%) of users of the project technology j who in the baseline were already consuming safe water without boiling it	See section D.1
W <sub>b,y,WEIGHTED,wood</sub>	Weighted Average of wood quantity in kg required to treat 1 litre of water using technologies representative of baseline scenario b during project year y, as per Baseline Water Boiling Test	To be calculated, Equation 10
Q <sub>p,y</sub>	Quantity of purified water consumed in the project scenario p per person per day	See section D.2
Q <sub>p,rawboil,y</sub>	Quantity of raw or unsafe water boiled in the baseline scenario b per person per day	See section D.2

▪ Calculate **W<sub>b,y,WEIGHTED,wood</sub>**

$$W_{b,y,WEIGHTED,wood} = (W_{b,y,TRAD,wood} * \% \text{ of Traditional Stove Users with wood in the baseline}) + (W_{b,y,IMP,wood} * \% \text{ of Improved Stove Users with wood in the baseline}) \quad \text{Equation 10}$$

Where

Parameters	Description	Source/value
W <sub>b,y,WEIGHTED,wood</sub>	Weighted Average of wood quantity in kg required to treat 1 litre of water using technologies representative of baseline scenario b during project year y, as per Baseline Water Boiling Test	Calculated; Equation 10
W <sub>b,y,TRAD,wood</sub>	Quantity of wood in kg required to treat 1 litre of water using Traditional cookstove in baseline scenario b during project year y	See section D.1
W <sub>b,y,IMP,wood</sub>	Quantity of wood in kg required to treat 1 litre of water using Improve cookstove in baseline scenario b during project year y	See section D.1
	% of Traditional Stove Users with wood in the baseline	See section D.1
	% of Improved Stove Users with wood in the baseline	See section D.1

▪ Calculate **B<sub>b,y,charcoal</sub>**

$$B_{b,y,charcoal} = \frac{(1-X_{boil}) * (1 - C_j) * N_{p,y} * (W_{b,y,WEIGHTED,charcoal})}{(Q_{p,y} + Q_{p,rawboil,y})} \quad \text{Equation 11}$$

Where

Parameters	Description	Source/value
$B_{b,y, \text{charcoal}}$	Quantity of charcoal consumed in baseline scenario b during the year y (tonnes)	Equation 11
$X_{\text{boil}}$	Percentage of premises that would have used other non-GHG emitting technologies like chlorine treatment techniques, if available, in the absence of project activities.	See section D.1
$C_j$	Portion(%) of users of the project technology j who in the baseline were already consuming safe water without boiling it	See section D.1
$N_{p,y}$	Number of person.days consuming water supplied by baseline scenario b through year y	See section D.2
$W_{b,y, \text{WEIGHTED}, \text{charcoal}}$	Average weighted quantity of charcoal in kg required to treat 1 litre of water using technologies representative of baseline scenario b during project year y, as per Baseline Water Boiling Test	To be calculated <b>Equation 12</b>
$Q_{p,y}$	Quantity of purified water consumed in the project scenario p per person per day	See section D.2
$Q_{p, \text{rawboil}, y}$	Quantity of raw or unsafe water boiled in the baseline scenario b per person per day	See section D.2

▪ Calculate  $W_{b,y, \text{WEIGHTED}, \text{charcoal}}$

$$W_{b,y, \text{WEIGHTED}, \text{charcoal}} = (W_{b,y, \text{TRAD}, \text{charcoal}} * \% \text{ of Traditional Stove Users with charcoal in the baseline}) + (W_{b,y, \text{IMP}, \text{charcoal}} * \% \text{ of Improved Stove Users with charcoal in the baseline})$$

**Equation 12**

Where

Parameters	Description	Source/value
$W_{b,y, \text{WEIGHTED}, \text{charcoal}}$	Weighted Average of charcoal quantity in kg required to treat 1 litre of water using technologies representative of baseline scenario b during project year y	<b>Equation 12</b>
$W_{b,y, \text{TRAD}, \text{charcoal}}$	Quantity of charcoal in kg required to treat 1 litre of water using Traditional cookstove in baseline scenario b during project year y	See section D.1
$W_{b,y, \text{IMP}, \text{charcoal}}$	Quantity of charcoal in kg required to treat 1 litre of water using Improve cookstove in baseline scenario b during project year y	See section D.1
	% of Traditional Stove Users with charcoal in the baseline	See section D.1
	% of Improved Stove Users with charcoal in the baseline	See section D.1

▪ Calculate  $B_{b,y, \text{LPG}}$

$$B_{b,y, \text{LPG}} = (1 - X_{\text{boil}}) * (1 - C_j) * N_{p,y} * (W_{b,y, \text{WEIGHTED}, \text{LPG}} * (Q_{p,y} + Q_{p, \text{rawboil}, y}))$$

**Equation 13**

Where

Parameters	Description	Source
$B_{b,y, \text{LPG}}$	Quantity of LPG consumed in baseline scenario b during the year y (tonnes)	<b>Equation 13</b>
$X_{\text{boil}}$	Percentage of premises that would have used other non-GHG emitting technologies like chlorine treatment techniques, if available, in the absence of project activities.	See section D.1
$C_j$	Portion (%) of users of the project technology j who in the baseline were already consuming safe water without boiling it	See section D.1
$N_{p,y}$	Number of person.days consuming water supplied by baseline scenario b through year y	See section D.2

$W_{b,y,WEIGHTED,LPG}$	Average weighted quantity of LPG required to treat 1 litre of water using technologies representative of baseline scenario b during project year y,	To be calculated <b>Equation 14</b>
$Q_{p,y}$	Quantity of purified water consumed in the project scenario p per person per day	See section D.2
$Q_{p,rawboil,y}$	Quantity of raw or unsafe water boiled in the baseline scenario b per person per day	See section D.2

▪ **Calculate  $W_{b,y,WEIGHTED,LPG}$**

$$W_{b,y,WEIGHTED,LPG} = [(W_{b,y,LPG(Small)} * \% \text{ of Small LPG stove usage in baseline scenario}) + (W_{b,y,LPG(Large)} * \% \text{ of Large LPG stove usage in baseline scenario})] * \% \text{ of LPG stove usage in the baseline scenario}$$

**Equation 14**

Where

Parameters	Description	Source
$W_{b,y,WEIGHTED,LPG}$	Weighted Average of LPG quantity in tonne required to treat 1 litre of water using technologies representative of baseline scenario b during project year y	<b>Equation 14</b>
$W_{b,y,LPG(Small)}$	Quantity of LPG in tonne required to treat 1 litre of water using LPG small stove in baseline scenario b during project year y	See section D.1
$W_{b,y,LPG(Large)}$	Quantity of LPG in ton required to treat 1 litre of water using LPG large stove in baseline scenario b during project year y	See section D.1
% of Small LPG stove usage in baseline scenario	% of Small LPG stove usage in baseline scenario	See section D.1
% of Large LPG stove usage in baseline scenario	% of Large LPG stove usage in baseline scenario	See section D.1
% of LPG stove in baseline scenario	% of LPG stove usage in the baseline scenario	See section D.1

Based on the above equations, the baseline emission for CP2-MP7<sup>46</sup> was estimated to be **43,059 tCO<sub>2</sub>e**.

**Goal 15 Contribution**

The project technology help users to reduce amount of fuel collected or purchased especially biomass save which contribute to the area of forest save. The indicator for this SDG15 would be **the area of forest save** which is relevant to the UN’s SDG indicator “15.1.1 Forest area as a proportion of total land area”.

*Estimating baseline outcome*

In baseline situation, no area of forest save. Thus, baseline outcome benefit is zero.

E.2. Calculation of project value or estimation of project situation of each SDG Impact

>>

**Goal 1 Contribution**

*Estimating project outcome:*

<sup>46</sup> Please refer to ER spreadsheet, tab “Nexus\_summary, cell U13”

In the project situation, the project outcome can be estimated as follows:

Project outcome (a) of SDG1

$$\text{The amount of Biomass use} = T_{p,y} * U_{p,y} * WQ_{Passed,y} * B_{Use,Biomass,p,y}$$

**Equation 15**

Project outcome (b) of SDG1

$$\text{The amount of LPG use} = T_{p,y} * U_{p,y} * WQ_{Passed,y} * B_{Use,LPG,p,y}$$

**Equation 16**

Project outcome (c) of SDG1 = % of household noted on money save in the project scenario

Baseline outcome (d) of SDG1 = % of household noted on time save in the project scenario

Where

Parameters	Description	Source/value
Project outcome (a) of SDG1	Total amount of biomass fuel use in project scenario (tonne)	To be calculated Equation 15
Project outcome (b) of SDG1	Total amount of LPG fuel use in project scenario (tonne)	To be calculated Equation 16
$T_{p,y}$	Cumulative number of sold project technologies (CWP)	See section D.2
$U_{p,y}$	Weighted average usage rate for technologies in project scenario p during year y, based on cumulative installation rate and drop off rate	See section D.2
$WQ_{Passed,y}$	Water Quality passing rate of water quality standard (WHO standard) per year	See section D.2
$B_{Use\_biomass,p,y}$	Amount of fuel use per household having CWP per year (including both wood and wood equivalent converting from charcoal) in project scenario	To be calculated <b>Equation 17</b>
$B_{Use\_LPG,p,y}$	Amount of LPG use per household having CWP per year in project scenario	To be calculated <b>Equation 20</b>
Project outcome (c) of SDG1	Percentage of household noted on money save after using the project technology (%)	Monitoring survey
Project outcome (d) of SDG1	Percentage of household noted on time save after using the project technology (%)	Monitoring survey

- Calculating  $B_{Use\_biomass,p,y}$ :

$$B_{Use\_biomass,p,y} = B_{Use\_wood,p,y} + B_{Use\_charcoal,p,y} * F_{wood-charcoal}$$

**Equation 17**

Where:

Parameters	Description	Source/value
$B_{Use\_wood,p,y}$	Amount of wood use per CWP per year in project scenario	To be calculated <b>Equation 18</b>
$B_{Use\_charcoal,p,y}$	Amount of charcoal use per CWP per year in project scenario	To be calculated <b>Equation 19</b>
$F_{wood-charcoal}$	Conversion factor from wood to charcoal	See section D.1

$$B_{Use\_wood,p,y} = B_{p,y,wood}$$

**Equation 18**

Parameters	Description	Source/value
$B_{p,y,wood,y}$	Quantity of fuel (wood) consumed in project scenario p during year y in tonnes	<b>Equation 22</b>

$$B_{Use,p,y, charcoal} = B_{p,y,charcoal}$$

**Equation 19**

Parameters	Description	Source/value
------------	-------------	--------------

$B_{p,y,charcoal}$	Quantity of fuel (charcoal) consumed in project scenario p during year y in tonnes	<b>Equation 24</b>
--------------------	--	--------------------

$B_{suse\_LPG,p,y} = B_{p,y,LPG}$		<b>Equation 20</b>
Parameters	Description	Source/value
$B_{p,y,LPG}$	Quantity of fuel (LPG) consumed in project scenario p during year y in tonnes	<b>Equation 26</b>

Based on the above equation and the monitoring survey data, the project estimation for SDG1 are summarized are below:

**Table 13. Project estimation for SDG1**

Indicator	Unit	Project estimation <sup>47</sup>
SDG1 (a) Biomass use	tonne	12,019
SDG1 (b) LPG use	tonne	93
SDG1 (c) % of HH noted on money save	%	89.09
SDG1 (d) of % of HH noted on time save	%	85.32

**Goal 3 contribution**

*Estimating project outcome:*

In project situation, the number of people using CWP and note that their kitchen is less smoke could be calculated below:

$$SDG3 \text{ contribution (number of people)} = T_{p,y} * N_{p,y} * U_{p,y} * WQ_{Passed,y} * N_{Less\_smoke,y}$$

Where

Parameters	Description	Source
Project outcome of SDG3	Number of people using CWP and note that their kitchen is less smoke	To be calculated
$T_{p,y}$	Cumulative number of sold project technologies (CWP)	See section D.2
$N_{p,y}$	The average population serviced by water purification system	See section D.2
$U_{p,y}$	Usage rate for technologies in project scenario p during year y, based on cumulative installation rate and drop off rate	See section D.2
$WQ_{Passed,y}$	Water Quality passing rate of water quality standard (WHO standard)	See section D.2
$N_{Less\_smoke,y}$	% of households notice that their kitchen is less smoke	See section D.2

Based on the above equation and the monitoring survey data, the number of people who notice less smoke in kitchen after having water filter<sup>48</sup> was 317,810 people.

**Goal 5 contribution**

*Estimating Project outcome:*

In the project situation, the number of women and girls benefiting from stop/reducing boiling water and collecting/purchasing cooking fuel can be estimated as following:

<sup>47</sup> Please refer to ER spreadsheet, tab "Nexus\_summary, cell X13:AA13"

<sup>48</sup> Please refer to ER spreadsheet, tab "Nexus\_Summary" Cell AB13

$$SDG5 \text{ contribution (number of people)} = T_{p,y} * N_{p,y} * U_{p,y} * WQ_{Passed,y} * (1-C_j) * Women\%_{HH} * Women\%_{cooking}$$

Parameters	Description	Source/value
Project outcome of SDG5	Number of women and girls benefiting from stop/reducing boiling water and collecting/purchasing cooking fuel	To be calculated
$T_{p,y}$	Cumulative number of sold project technologies (CWP)	Sale database
$N_{p,y}$	The average population serviced by water purification system	See section D.2
$U_{p,y}$	Usage rate for technologies in project scenario p during year y, based on cumulative installation rate and drop off rate	See section D.2
$WQ_{Passed,y}$	Water Quality passing rate of water quality standard (WHO standard)	See section D.2
$C_j$	Portion(%) of users of the project technology j who in the baseline were already consuming safe water without boiling it	See section D.1
$Women\%_{HH}$	Average percentage of women and girls per household	See section D.2
$Women\%_{cooking}$	Average percentage of women and girls responsible for water boiling and collecting/purchasing cooking fuel before having CWPs.	See section D.2

Based on the above equation and the monitoring survey data, number of women and girls benefiting from stop/reducing boiling water and collecting/purchasing cooking fuel<sup>49</sup> was estimated to be 179,579 people.

### Goal 6 contribution

*Estimating project outcome:*

In the project situation, the number of people with access to safe drinking water can be estimated as following:

$$Project \text{ outcome of SDG6} = T_{p,y} * N_{p,y} * U_{p,y} * WQ_{Passed,y}$$

Where

Parameters	Description	Source/value
Project outcome of SDG6	Number of people with access to safe drinking water	To be calculated
$T_{p,y}$	Cumulative number of sold project technologies (CWP)	See section D.2
$N_{p,y}$	The average population serviced by water purification system	See section D.2
$U_{p,y}$	Usage rate for technologies in project scenario p during year y, based on cumulative installation rate and drop off rate	See section D.2
$WQ_{Passed,y}$	Water Quality passing rate of water quality standard (WHO standard)	See section D.2

Based on the above equation and the monitoring survey data, number of people with access to safe drinking water was estimated to be 562,297 people<sup>50</sup>.

<sup>49</sup> Please refer to ER spreadsheet, tab "Nexus\_Summary" Cell AC13

<sup>50</sup> Please refer to ER spreadsheet, tab "Nexus\_Summary" Cell AD13

**Goal 7 contribution**

*Project situation:*

In project situation, the amount of energy saves from avoiding boiling water is calculated as following:

$$SDG7\ contribution = (Amount\ of\ biomass\ use\ in\ baseline\ scenario - Amount\ of\ biomass\ use\ in\ project\ scenario) * NCV_{b,wood} + (amount\ of\ LPG\ use\ in\ baseline - LPG\ use\ in\ project) * NCV_{b,LPG}$$

Where

Parameters	Description	Source
Amount of biomass use in baseline scenario	Amount of biomass use in baseline (tonne)	See Equation 1
Amount of biomass use in project scenario	Amount of biomass use in project (tonne)	See Equation 15
NCV <sub>b,wood</sub>	Net calorific value of wood that is substituted or reduced	0.015 TJ/ton (see section A.3)
Amount of LPG use in Baseline	Amount of LPG use in baseline (tonnes)	See Equation 2
Amount of LPG use in project	Amount of LPG use in project (tonnes)	See Equation 16
NCV <sub>b,LPG</sub>	Net calorific value of LPG that is substituted or reduced	See section D.1

Based on the above equation and the monitoring survey data, the amount of energy saved from avoiding boiling water was estimated to be 792 TJ<sup>51</sup>.

**Goal 8 contribution**

*Estimating project outcome:*

In project situation, the number of created jobs with safe and healthy work environment is recorded by the project implementer as well as producers/retailers:

*Project outcome of SDG8 = Number of created jobs with safe and healthy work environment\* % of worker with salaries paid are at par with wage laws in the host country.*

According to the monitoring survey data, the number of new jobs created by the project with safe and healthy work environment was 114 people<sup>52</sup> and 100% of them were paid with salaries at par with wage laws.

<sup>51</sup> Please refer to ER spreadsheet, tab "Nexus\_Summary" Cell AE13

<sup>52</sup> Please refer to ER spreadsheet, tab "Nexus\_Summary" Cell AF13

### Goal 13 contribution

Emissions for project scenario *p* during the year *y*  $PE_{p,y}$  (tCO<sub>2</sub>e)

$$PE_{p,y} = B_{p,y,wood} * ((\int_{NRB,p,y} * EF_{p,wood,CO2}) + EF_{p,wood,nonCO2}) * NCV_{p,wood} + B_{p,y,charcoal} * \text{Wood to charcoal factor} ((\int_{NRB,p,y} * EF_{p,wood,CO2}) + EF_{p,wood,nonCO2}) * NCV_{p,wood} + B_{p,y,LPG} * ((\int_{ff,p,y} * EF_{p,LPG,CO2}) + EF_{p,LPG,nonCO2}) * NCV_{p,LPG}$$

Equation 21

Where

Parameters	Description	Source
$PE_{p,y}$	Emissions for project scenario <i>p</i> during the year <i>y</i> in tCO <sub>2</sub> e	Equation 21
$B_{p,y,wood}$	Quantity of fuel (wood) consumed in project scenario <i>p</i> during year <i>y</i> , in tonnes	To be calculated Equation 22
$B_{p,y,charcoal}$	Quantity of fuel (charcoal) consumed in project scenario <i>p</i> during year <i>y</i> , in tonnes	Equation 24
$B_{p,y,LPG}$	Quantity of fuel (LPG) consumed in project scenario <i>p</i> during year <i>y</i> , in tonnes	Equation 26
Wood to charcoal conversion factor	Wood to charcoal conversion factor	See section D.1
$\int_{NRB,y}$	Fraction of biomass used during year <i>y</i> for the considered scenario that can be established as non-renewable biomass	See section D.1
$EF_{p,wood,CO2}$	CO <sub>2</sub> emissions factor of the project fuel (wood) This is equal to the baseline fuel EF in projects which use the same fuel,	See section D.1
$EF_{p,charcoal,CO2}$	CO <sub>2</sub> emissions factor of the project fuel (charcoal) This is equal to the baseline fuel EF in projects which use the same fuel,	See section D.1
$EF_{p,LPG,CO2}$	CO <sub>2</sub> emissions factor of the project fuel (LPG) This is equal to the baseline fuel EF in projects which use the same fuel,	See section D.1
$EF_{p,wood,nonCO2}$	Non-CO <sub>2</sub> emissions factor of the project fuel (wood) This is equal to the baseline wood EF in projects which use the same fuel.	See section D.1
$EF_{p,LPG,nonCO2}$	Non-CO <sub>2</sub> emissions factor of the project fuel (LPG) This is equal to the baseline wood EF in projects which use the same fuel.	See section D.1
$NCV_{p,wood}$	Net calorific value of the project wood	See section D.1
$NCV_{p,LPG}$	Net calorific value of the project LPG	See section D.1

▪ Calculate  $B_{p,y,wood}$

$$B_{p,y,wood} = (1 - C_j) * N_{p,y} * (W_{p,y,WEIGHTED,wood}) * (Q_{p,rawboil,y} + Q_{p,cleanboil,y})$$

Equation 22

Where

Parameters	Description	Source/value
$B_{p,y,wood}$	Quantity of fuel consumed in project scenario <i>p</i> during the year <i>y</i> (tonnes)	Equation 22
$N_{p,y}$	Number of person.days consuming water supplied by project scenario <i>p</i> through year <i>y</i>	See section D.2
$C_j$	Portion(%) of users of the project technology <i>j</i> who in the baseline were already consuming safe water without boiling it	See section D.2

$W_{p,y,WEIGHTED,wood}$	Weighted Average of wood quantity in kg required to treat 1 litre of water using technologies representative of project scenario p during project year y	To be calculated Equation 23
$Q_{p,rawboil,y}$	Quantity of raw or unsafe water boiled in the project scenario p per person per day	See section D.2
$Q_{p,cleanboil,y}$	Quantity of safe water boiled in the project scenario p per person per day	See section D.2

▪ Calculate  $W_{p,y,WEIGHTED,wood}$

$$W_{p,y,WEIGHTED,wood} = (W_{p,y,TRAD,wood} * \% \text{ of Traditional Stove Users with wood in the project}) + (W_{p,y,IMP,wood} * \% \text{ of Improved Stove Users with wood in the project})$$

**Equation 23**

Where

Parameters	Description	Source/value
$W_{p,y,WEIGHTED,wood}$	Weighted Average of wood quantity in kg required to treat 1 litre of water using technologies representative of project scenario p during project year y, as per Baseline Water Boiling Test	Equation 23
$W_{p,y,TRAD,wood}$	Quantity of wood in kg required to treat 1 litre of water using Traditional cookstove in project scenario p during project year y	See section D.1
$W_{p,y,IMP,wood}$	Quantity of wood in kg required to treat 1 litre of water using Improve cookstove in project scenario p during project year y	See section D.1
	% of Traditional Stove Users with wood in the project scenario	See section D.2
	% of Improved Stove Users with wood in the project scenario	See section D.2

▪ Calculate  $B_{p,y,charcoal}$

$$B_{p,y,charcoal} = (1 - C_j) * N_{p,y} * (W_{p,y,WEIGHTED,charcoal}) * (Q_{p,rawboil,y} + Q_{p,cleanboil,y})$$

**Equation 24**

Where

Parameters	Description	Source
$B_{p,y,charcoal}$	Quantity of charcoal consumed in project scenario p during the year y (tonnes)	Equation 24
$C_j$	Portion(%) of users of the project technology j who in the baseline were already consuming safe water without boiling it	See section D.1
$N_{p,y}$	Number of person.days consuming water supplied by project scenario p through year y	See section D.2
$W_{p,y,WEIGHTED,charcoal}$	Average weighted quantity of charcoal in kg required to treat 1 litre of water using technologies representative of project scenario p during project year y,	To be calculated Equation 25

▪ Calculate  $W_{p,y,WEIGHTED,charcoal}$

$$W_{p,y,WEIGHTED,charcoal} = (W_{p,y,TRAD,charcoal} * \% \text{ of Traditional Stove Users with charcoal in the project}) + (W_{p,y,IMP,charcoal} * \% \text{ of Improved Stove Users with charcoal in the project})$$

**Equation 25**

Where

Parameters	Description	Source/value
$W_{b,y,WEIGHTED,charcoal}$	Weighted Average of charcoal quantity in kg required to treat 1 litre of water using technologies representative of project scenario b during project year y, as per Baseline Water Boiling Test	Calculated <b>Equation 25</b>
$W_{b,y,TRAD,charcoal}$	Quantity of charcoal in kg required to treat 1 litre of water using Traditional cookstove in project scenario p during project year y	See section D.1
$W_{b,y,IMP,charcoal}$	Quantity of charcoal in kg required to treat 1 litre of water using Improve cookstove in project scenario p during project year y	See section D.1
% of Traditional Stove Users with charcoal in the project	% of Traditional Stove Users with charcoal in the project	See section D.2
% of Improved Stove Users with charcoal in the project)	% of Improved Stove Users with charcoal in the project)	See section D.2

▪ **Calculate  $B_{p,y,LPG}$**

$$B_{p,y,LPG} = (1 - C_j) * N_{p,y} * (W_{p,y,WEIGHTED,LPG}) * (Q_{p,y} + Q_{p,rawboil,y})$$

**Equation 26**

Where

Parameters	Description	Source
$B_{p,y,LPG}$	Quantity of LPG consumed in project scenario b during the year y (tonnes)	<b>Equation 26</b>
$C_j$	Portion(%) of users of the project technology j who in the baseline were already consuming safe water without boiling it	See section D.1
$N_{p,y}$	Number of person.days consuming water supplied by baseline scenario b through year y	See section D.2
$W_{p,y,WEIGHTED,LPG}$	Average weighted quantity of LPG in tonnes required to treat 1 litre of water using technologies representative of project scenario b during project year y,	To be calculated <b>Equation 27</b>
$Q_{p,y}$	Quantity of clean water boiled in the project scenario p per person per day	See section D.2
$Q_{p,rawboil,y}$	Quantity of raw or unsafe water boiled in the project scenario p per person per day	See section D.2

▪ **Calculate  $W_{p,y,WEIGHTED,LPG}$**

$$W_{p,y,WEIGHTED,LPG} = [(W_{p,y,LPG(Small)} * \% \text{ of Small LPG stove usage in project scenario}) + (W_{p,y,LPG(Large)} * \% \text{ of Large LPG stove usage in project scenario})] * \% \text{ of LPG stove usage in the project scenario}$$

**Equation 27**

Where

Parameters	Description	Source/value
$W_{p,y,WEIGHTED,LPG}$	Weighted Average of LPG quantity in kg required to treat 1 litre of water using technologies representative of project scenario p during project year y	<b>Equation 27</b>
$W_{p,y,LPG(Small)}$	Quantity of LPG in tonnes required to treat 1 litre of water using small LPG cookstove in project scenario b during project year y	See section D.1

$W_{p,y,LPG(Large)}$	Quantity of LPG in tonnes required to treat 1 litre of water using Large LPG cookstove in project scenario b during project year y	See section D.1
% of Small LPG stove usage in project scenario	% of Small LPG stove usage in project scenario	See section D.2
% of Large LPG stove usage project scenario	% of Large LPG stove usage in project scenario	See section D.2
% of LPG stove usage in the project scenario	% of LPG stove usage in the project scenario	See section D.2

Based on the above equation and the monitoring survey data, the project emission for CP2-MP7 was estimated to be 8,041 tCO<sub>2</sub>e<sup>53</sup>.

### Goal 15 Contribution

#### Estimating project outcome

Project outcome of SDG15 = (Amount of biomass use in baseline scenario – Amount of biomass use in project scenario) \*  $f_{NRBy}$  /Growth stock in forest

Parameter	Description	Value/source
Amount of biomass use in baseline scenario	Amount of biomass use in baseline per year [tonne]	Equation 1
Amount of biomass use in project scenario	Amount of biomass use in project per year [tonne]	Equation 15
$f_{NRBy}$	Fraction of woody biomass used in the absence of the project activity in year y that can be established as non-renewable	See section D.1
Growth stock in forest	Growth stock in forest in Cambodia	See section D.1

Based on the above equation, the area of forest saved in project scenario was estimated to be 307 hectares<sup>54</sup>.

<sup>53</sup> Please refer to ER spreadsheet, tab "Nexus\_Summary" Cell AG13

<sup>54</sup> Please refer to ER spreadsheet, tab "Nexus\_Summary" Cell AH13

E.3. Calculation of leakage

It should be noted at the factory, woods are used as energy source for manufacturing ceramic pots. Thus, the wood consumption is contributing to the project leakage.

**Project leakage = Leakage per Unit \* Total distributed water purifier units** **Equation 28**

$$\begin{aligned} \text{Leakage per unit per year} &= \text{Weight of wood per m}^3 * \text{Quantity of wood purchased} \\ &\quad \text{for factory} * \text{Carbon content in wood} * f_{\text{NRB}} * \left( \frac{\text{molecular weight of CO}_2}{\text{molecular weight of Carbon}} \right) / \text{conversion} \\ &\quad \text{from kg to tonnes} / \text{number of units sold in this monitoring period} \end{aligned} \quad \text{Equation 29}$$

Based on **Equation 28** and Equation 29, the project leakage is estimated to be 0 tCO<sub>2</sub>e<sup>55</sup>.

E.4. Calculation of net benefits or direct calculation for each SDG Impact

**Goal 1 Contribution**

*Estimating net benefit*

Net benefit (a) of SDG1 = Baseline outcome (a) of SDG1 – Project outcome (a) of SDG1

Net benefit (b) of SDG1 = Baseline outcome (b) of SDG1 – Project outcome (b) of SDG1

Net benefit (c) of SDG1 = Project outcome (c) of SDG1 – Baseline outcome (c) of SDG1

Net benefit (d) of SDG1 = Project outcome (d) of SDG1 – Baseline outcome (d) of SDG1

**Table 14 - Net benefits of SDG 1**

Indicator	Unit	Baseline outcome	Project outcome	Net benefits <sup>56</sup>
<b>SDG1 (a) Biomass use</b>	tonne	61,862	12,019	49,843
<b>SDG1 (b) LPG use</b>	tonne	1,039	93	946
<b>SDG1 (c) % of HH noted on money save</b>	%	0	89.09	89.09
<b>SDG1 (d) of % of HH noted on time save</b>	%	0	85.32	85.32

**Goal 3 contribution**

*Estimating net benefit*

The net benefit of SDG3 = Project outcome of SDG3 (317,810) - Baseline outcome of SDG3 (0)

= 317,810 people.

**Goal 5 contribution**

<sup>55</sup> Please refer to ER spreadsheet, tab "Units\_month", Sum (M163:M173)

<sup>56</sup> Please refer to ER spreadsheet, tab "Nexus\_Summary" Cell AJ13:AM13

*Estimating the net benefit*

The net benefit of SDG5 = Project outcome of SDG5 (179,579) – Baseline outcome of SDG5 (0)  
 = 179,579 people

**Goal 6 contribution**

*Estimating the net benefit*

The net benefit of SDG6 = Project outcome of SDG6 (562,297) – Baseline outcome of SDG6 (0)  
 = 562,297 people.

**Goal 7 contribution**

*Estimating net benefit*

Net benefit of SDG7= Project outcome of SDG7 (792 – Baseline outcome of SDG7 (0)  
 = 792 TJ

**Goal 8 contribution**

*Estimating net benefit*

Net benefit of SDG8 = Project outcome of SDG8 (114) – Baseline outcome of SDG8 (0)  
 = 114 people

**Goal 13 contribution**

Net benefit of SDG13 = Baseline emission – Project emission – Leakage emission

Indicator	Baseline emission	Project emission	Leakage emission	Net benefits <sup>57</sup>
SDG13 Emission	43,059	8,041	0	35,018

**Goal 15 contribution**

*Estimating net benefit*

Net benefit of SDG15= Project outcome of SDG15 (307) – Baseline outcome of SDG15  
 = 307 Hectare

The following table summarizes the net benefits of the project.

<sup>57</sup> It should be noted that this figure is rounded.

**Table 15 - Summary of net benefit per each SDG**

SDG	SDG Impact	Net benefit <sup>58</sup>
SDG 13	Total emission reduction (VERs)	35,018
SDG 1 (a)	Amount of biomass save (tonnes)	49,843
SDG 1 (b)	Amount of LPG save (tonnes)	946
SDG 1 (c)	Percentage of household noted on money save after using the project technology	89.09%
SDG 1 (d)	Percentage of household noted on time save after using the project technology	85.32%
SDG 3	Number of people who notice less smoke in kitchen after having water filter	317,810
SDG 5	Number of women and girls benefiting from stop/reduce boiling water and collecting/purchasing cooking fuel	179,579
SDG 6	Number of people with access to safe drinking water	562,297
SDG7	Amount of energy saves from avoiding boiling water in the project activity (TJ)	792
SDG 8	The number of new jobs created by the project with safe and healthy work environment	114
SDG15	The areas of forest save (Hectare)	307

<sup>58</sup> Please refer to ER spreadsheet, tab "Nexus\_Summary" Cell AJ13:AT13.

E.5. Comparison of actual SDG Impacts with estimates in approved PDD

SDG	Values estimated in ex ante calculation of approved PDD/Transition Annex <sup>59</sup>	Actual values achieved during this monitoring period
13	74,609 tCO2e	35,018 tCO2e
1 (a)	52,206 tonnes	49,843 tonnes
1 (b)	754 tonnes	946 tonnes
1 (c)	88.20%	89.09%
1 (d)	89.60%	85.32%
3	661,992 People	317,810 people
5	310,339 women and girls	179,579 women and girls
6	724,280 People	562,297 people
7	818 TJ	792 TJ
8	105 People	114 People
15	321 Hectare	307 Hectare

E.5.1. Explanation of calculation of value estimated ex ante calculation of approved PDD for this monitoring period

The calculation method of value estimated in ex ante calculation of approved PDD for this monitoring period is the same as the one in this monitoring period. However, the differences are the value of both the non-monitored parameters and monitored parameters which will be elaborated in the following section E.6.

E.6. Remarks on increase in achieved SDG Impacts from estimated value in approved PDD

Based on the above table, some net SDGs contribution value achieved in CP2-MP7 are lower than PDD/transition annex (SDG1(a,d), SDG3, SDG5, SDG6, SDG7 and SDG15) but some are higher (SDG1(b,c), SDG8 and SDG13 because of the main following changes:

<sup>59</sup> See HSE\_CP2\_ER\_Cal\_20191027\_R1\_20240613(MP6&MP7), Tab Nexus, cell O13:Y13

Description	PDD/ER <sup>60</sup>	01/01/2024 – 30/11/2024 <sup>61</sup>	Relevant Unit	Remarks
B <sub>b,y,wood</sub>	0.668	0.471	tonnes/year	B <sub>b,y,wood</sub> is lower than that presented in the PDD which is mainly due to the change in N <sub>p,y</sub> .
B <sub>b,y,charcoal</sub>	0.033	0.017	tonnes/year	B <sub>b,y,charcoal</sub> is lower than that presented in the PDD which is mainly due to the change in N <sub>p,y</sub> .
B <sub>b,y,LPG</sub>	0.013	0.010	tonnes/year	B <sub>b,y,LPG</sub> is slightly lower than that presented in the PDD which is mainly due to the change in N <sub>p,y</sub> .
N <sub>p,y</sub>	1,875.735	1,597.950	person.days	Latest WCFT showed that the number of person per HH is lower than that applied in PDD being 4.77 and 5.139 person per day per household respectively.
Q <sub>p,y</sub>	1.630	1.690	Litres/ person/day	Latest WCFT showed that the Q <sub>p,y</sub> is slightly higher than that applied in PDD.
Q <sub>p,rawboil,y</sub>	1.554	0.310	Litres/ person/day	Latest WCFT showed that the Q <sub>p,rawboil,y</sub> is lower than that applied in PDD.
Q <sub>p,cleanboil,y</sub>	0.050	0.020	Litres/ person/day	Latest WCFT showed that the Q <sub>p,cleanboil,y</sub> is lower than that applied in PDD.
W <sub>b,y,WEIGHTED,wood</sub>	0.000160	0.000211	tonnes/year	W <sub>b,y,WEIGHTED,wood</sub> is slightly higher than that applied in PDD due to the new result from BWBT conducted in CP2-MP1.
W <sub>b,y,WEIGHTED,charcoal</sub>	0.000008	0.000008	tonnes/year	W <sub>b,y,WEIGHTED,charcoal</sub> is equal to that applied in PDD.
B <sub>p,y,wood</sub>	0.357	0.068	tonnes/year	B <sub>p,y,wood</sub> is lower than that presented in the PDD due to the change in volume of water consumed per HH.
B <sub>p,y,charcoal</sub>	0.018	0.007	tonnes/year	B <sub>p,y,charcoal</sub> is lower than that presented in the PDD due to the change in W <sub>b,y</sub> for charcoal from 138.9324grams/liter in PDD to 125 grams/liter (Capped value from GS Rule Update in this MP).
B <sub>p,y,LPG</sub>	0.007	0.001	tonnes/year	B <sub>p,y,LPG</sub> is lower than that presented in PDD due to differences in amount of water consumed per day.
C <sub>j</sub>	0.260	0.260	-	No change
X <sub>boil</sub>	0.058	0.058	-	No Change

<sup>60</sup> CP2-1\_HSE\_CP2\_PDD\_20240613\_Ver11.3(TrackChange), (page 40,41); and HSE\_CP2\_ER\_Cal\_20191027\_R1\_20240613(MP6&MP7), (Tab PDU Summary, Row 18-51), (Tab Nexus, Cell O13:Y13).

<sup>61</sup> ER spreadsheet, Tab (Parameter\_Summary, column E18:E52), Tab (Parameter\_Summary, column X18:X28).

Description	PDD/ER <sup>60</sup>	01/01/2024 – 30/11/2024 <sup>61</sup>	Relevant Unit	Remarks
BE <sub>b,y,wood</sub>	0.951	0.304	tCO <sub>2</sub> e	BE <sub>b,y,wood</sub> is lower than that applied value in the PDD due to reduction of fNRB.
PE <sub>p,y,wood</sub>	0.508	0.044	tCO <sub>2</sub> e	PE <sub>b,y,wood</sub> is lower due to lower amount of water consumption per day per person and lower fNRB.
BE <sub>b,y,charcoal</sub>	0.286	0.065	tCO <sub>2</sub> e	BE <sub>b,y,charcoal</sub> is lower than that presented in the PDD due to the change in W <sub>b,y</sub> for charcoal from 138.9324grams/liter in PDD to 125 grams/liter (updated value from the Rule Update and lower fNRB in this MP.
PE <sub>p,y,charcoal</sub>	0.153	0.028	tCO <sub>2</sub> e	PE <sub>b,y,charcoal</sub> is lower than that presented in the PDD.
BE <sub>b,y,LPG</sub>	0.037	0.029	tCO <sub>2</sub> e	BE <sub>b,y,wood</sub> is lower than that presented in the PDD.
PE <sub>p,y,LPG</sub>	0.020	0.003	tCO <sub>2</sub> e	PE <sub>p,y,wood</sub> is lower amount of water consumption per day per person.
f <sub>NRB,y</sub>	77.00%	30%	%	f <sub>NRB,y</sub> applied in PDD is expired in 2019, for this MP, PP has updated it with the value of 30% based on the default value of CDM tool33 version 2.0.
NCV <sub>b,wood</sub> / NCV <sub>p,wood</sub>	0.015	0.015	TJ/ton	No change
NCV <sub>b,charcoal</sub> / NCV <sub>p,charcoal</sub>	0.030	0.030	TJ/ton	No change
NCV <sub>b,LPG</sub> / NCV <sub>p,LPG</sub>	0.047	0.047	TJ/ton	No change
EF <sub>b,wood,CO2</sub> / EF <sub>p,wood,CO2</sub>	112.000	112.000	tCO <sub>2</sub> /TJ	No change
EF <sub>b,charcoal,CO2</sub> / EF <sub>p,charcoal,CO2</sub>	112.000	112.000	tCO <sub>2</sub> /TJ	No change
EF <sub>b,LPG,CO2</sub> / EF <sub>p,LPG,CO2</sub>	63.100	63.100	tCO <sub>2</sub> /TJ	No change
EF <sub>b,wood,nonCO2</sub> / EF <sub>p,wood,nonCO2</sub>	8.692	9.460	tCO <sub>2</sub> /TJ	The increase is due to the application of the new GPW (CH <sub>4</sub> , NO <sub>2</sub> ) of AR5 compared to that of AR4.
EF <sub>b,charcoal,nonCO2</sub> / EF <sub>p,charcoal,nonCO2</sub>	5.298	5.865	tCO <sub>2</sub> e/TJ	The increase is due to the application of the new GPW (CH <sub>4</sub> , NO <sub>2</sub> ) of AR5 compared to that of AR4.
BE <sub>b,y</sub>	1.274	0.398	tCO <sub>2</sub> e	With lower number of person per HH and lower fNRB, the baseline emission is lower than that applied in PDD.
PE <sub>p,y</sub>	0.681	0.074	tCO <sub>2</sub> e	With lower number of people per HH and lower fNRB, the

Description	PDD/ER <sup>60</sup>	01/01/2024 – 30/11/2024 <sup>61</sup>	Relevant Unit	Remarks
				project emission is lower than that applied in PDD.
U <sub>p,y</sub>	80.5	80.76%	%	Usage rate is slightly higher than that applied in PP.
LE <sub>p,y</sub>	0.00	-	tCO <sub>2</sub> e	LE <sub>p,y</sub> is zero same as that applied in the revised PDD. PD has introduced LPG Kiln at its production line in which the emission is minimal and it is negligible based on the registered methodology TPDDTEC3.0.
% of passing Water Quality test	80.00	93.33%	%	The passing rate of water quality test is higher than that projected in PDD. This might be due to the improvement of hygiene and operation and maintenance knowledge of CWP’s users through PP’s hygiene campaign.
ER <sub>y</sub>	0.59	0.32	tCO <sub>2</sub> e/Unit	ER <sub>y</sub> is lower than that presented in PDD due to the above different applied values, especially the newly updated f <sub>NRB</sub> .
Units sold	49,214	31,945	CWP	The demand for CWPs keeps on fluctuating and thus is lower than the estimated one. It should be noted that the sale estimated in PDD was forecasted in 2017 based on sale figure from 2013 to 2016 when the sale was high. The sale dropped significantly in 2018 due to Hydrologic staff restructuring and the general election in Cambodia which limited the promotion activity in the communities. During this MP (2024), the total sale from Jan to Nov was slightly higher than that of year 2023 being 31,945 and 26,252 CWPs respectively.
SDG13	84,414	35,018	tCO <sub>2</sub> e	Total ER in this monitoring period is lower than that of PDD due to different and lower value of parameters applied as described above, especially the updated f <sub>NRB</sub> .
SDG1(a)	57,538.00	49,843	tonnes	The amount of biomass save in this MP is slightly lower than that estimated in transition annex. This might be mainly due to the higher value of other

Description	PDD/ER <sup>60</sup>	01/01/2024 – 30/11/2024 <sup>61</sup>	Relevant Unit	Remarks
				associated parameters in this MP as mentioned above.
SDG1(b)	831.00	946	tonnes	The amount of LPG save in this MP is higher than that estimated in transition annex. This might be mainly due to the higher water quality passing rate and other associated parameters in this MP as mentioned above.
SDG1(c)	88.20%	89.09%	%	This varies depend on the perception of the user response but around 89.09% of household noted on money save after using the project technology in this MP.
SDG1(d)	89.60%	85.32%	%	This varies depend on the perception of the user response but around 85.32% of household noted on time save after using the project technology in this MP.
SDG3	668,806.00	317,810	People	Lower number of people who notice less smoke in kitchen after using CWPs in this MP compared to PDD. This varies depend on the perception of the user response.
SDG5	313,534.00	179,579	Women and girls	Lower number of women and girls benefiting from stop/reduce boiling water and collecting/purchasing cooking fuel after using CWPs in this MP compared to PDD. This varies depend on the perception of the user response.
SDG6	731,735.00	562,297	People	Lower number of people access to safe drinking water after using CWPs in this MP compared to PDD. This might be mainly due to lower number of persons per each household in this MP compared to PDD as stated above.
SDG7	902	792	TJ	The amount of energy save in this MP is slightly lower than that estimated in transition annex.
SDG8	105	114	Staffs	The staff is fluctuating over the year. It is expected that more field staffs are recruited as PP is reopening/expanding its operation in more provinces in 2024.

Description	PDD/ER <sup>60</sup>	01/01/2024 – 30/11/2024 <sup>61</sup>	Relevant Unit	Remarks
SDG15	354	307	Hectare	The amount of area of forest save in this MP is slightly lower than that estimated in transition annex.

## SECTION F. SAFEGUARDS REPORTING

The project involves in the application of silver colloid the production of water filter. Ministry of Industry and handicraft have determined the environmental impact of Hydrologic and because no chemicals are emitted no monitoring is deemed necessary. Hydrologic has followed and fulfilled the national environmental requirements as proven by its certificate for factory operation<sup>62</sup>.

## SECTION G. STAKEHOLDER INPUTS AND LEGAL DISPUTES

G.1. List all Inputs and Grievances which have been received via the Continuous Input and Grievance Mechanism together with their respective responses/mitigations.

>>

As discussed in Local stakeholder consultation report, three main channels have been set up (1) Grievance Expression Process Book, (2) Telephone access, (3) Internet/Email access, as part of grievance mechanism. In this grievance mechanism, public can contact not only the project owner but also the Gold Standard as shown in below table.

E. 2. Discussion on continuous input / grievance mechanism		
[See Annex W]		
Discuss the Continuous input / grievance mechanism expression method and details, as discussed with local stakeholders.		
	Method Chosen (include all known details e.g. location of book, phone, number, identity of mediator)	Justification
Continuous Input / Grievance Expression Process Book	Complaints or any other concerns can be stated and will be filed directly at the head office of HSE at House 97A, Street 15BT (Ta Phon), Sansom Kosal 1, Boeung Tumpun, Phnom Penh, Cambodia	Any complaint can be dropped at Hydrologic head office.
Telephone access	Hydrologic - Desk phone: 023 6911 981 - Hotline: 096 3295 599 - Hotline: 096 6767 689 Gold standard - +41 (0) 22 788 7080	Beside a desk phone, two dedicated hotlines (mobile phone) of Hydrologic are open to receive any comment, complaint from the users. The number of calls and issues is recorded and reported to project coordinator. The Gold Standard can also be contacted with this provided phone number.
Internet/email access	Hydrologic <a href="http://www.hydrologichealth.com">http://www.hydrologichealth.com</a> <a href="mailto:p-coordinator@hydrologichealth.com">p-coordinator@hydrologichealth.com</a>  Gold Standard <a href="http://www.goldstandard.org">www.goldstandard.org</a> <a href="mailto:info@goldstandard.org">info@goldstandard.org</a>	For users or pubic who have access to internet, they can drop their comment or complaint at both hydrologic and Gold Standard's webpage or email.

During this monitoring period, there was not any comment received from the 1<sup>st</sup> channel nor the 3<sup>rd</sup> channel but there was from the 2<sup>nd</sup> channel. The number of

<sup>62</sup> Certification of factory operation

complaints/comments reported from the hotlines were 259 cases: issue with pot (217), issue with spigot (40), and other issues (2) as shown in below table. Then, these issues were followed up with call and field visit if necessary. All the received hotline calls have been followed up and closed.

Type of issue	# of issues reported via hotline calls <sup>63</sup>	Status of the issues Closed cases
Issue with Pot (cracked, decayed, slow filtering)	217	217
Issue with Spigot	40	40
Other issue (filter cover, filter standing support)	2	2
Total	259	259

G.2. Report on any stakeholder mitigations that were agreed to be monitored.

Description of Sustainability Matrix	Monitoring
To address the concern of high price of CWP, the calculation of the CWP is based on the break-even price of the water filter +10% markup price if there is carbon finance.	Based on the annual sale in this monitoring period, the weighted average price charged for all types of CWP is estimated to be \$36.82 which is below its break-even price + 10% profit margin weighted average of \$43.54. The detail of the break-even price + 10% markup price is described and available to VVB <sup>64</sup> .
To address the concern of the place where the clay is taken, Hydrologic will buy the clay only from the licensed brick manufacturing factory that authorized by the Ministry of Industry and Handicraft.	During this monitoring, PP has not purchased clay because they have enough stock from its previous purchase in 2018 from a nearby licensed brick factory. It should be noted that Hydrologic’s factory is located in the brick manufacturing zone, where access to clay from the licensed factory is not difficult.
To address the concern of corruption, the field Surveys will monitor and ask how much people are paying for the water filters and assess that the prices are not unreasonable. If the prices are unreasonable, PP shall investigate the reason and take appropriate action. PP believes that this risk is low because there are so many salespeople that competition will keep the price low.	The monitoring survey revealed that the mean purchase price for ceramic water purifier (CWP) is \$43.32 which is in line with current pricing <sup>65</sup> (\$45).

G.3. Provide details of any legal contest that has arisen with the project during the monitoring period

There is no any legal contest during this monitoring period.

<sup>63</sup> HSE\_CP2-MP7\_Hotline Tracking Record\_Jan-Nov 2024, tab Summary, column K23:K27.

<sup>64</sup> HSE-CP2-MP7-Break Even Price\_Jan-Nov 24

<sup>65</sup> HSE\_CP2-MP7-DS-Price

## Revision History

Version	Date	Remarks
1.1	14 October 2020	<p>Hyperlinked section summary to enable quick access to key sections</p> <p>Improved clarity on Key Project Information Section for POA monitoring</p> <p>Forward action request section</p> <p>Improved Clarity on SDG contribution/SDG Impact term used throughout</p> <p>Clarity on safeguard reporting</p> <p>Clarity on design changes</p> <p>Leakage section added for VER/CER projects</p> <p>Addition of Comparison of monitored parameters with last monitoring period</p> <p>Provision of an <a href="#">accompanying Guide</a> to help the user understand detailed rules and requirements</p>
1.0	10 July 2017	Initial adoption